



For Innovation

10/576893

10/576893 24 APR 2006

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to additional company law rules.

Signed

Dated 4 April 2006

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

dti A DTI SERVICE

**BEST AVAILABLE COPY**



THE PATENT OFFICE  
F  
16 AUG 2003  
NEWPORT



18AUG03 E831030-1 C12133  
P01/7700 0.00-0349317.4

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

593

2. Patent application number

(The Patent Office will fill in this part)

16 AUG 2003

0319317.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

MARIS TDM LIMITED  
KNIGHTWAY HOUSE  
PARK STREET  
BAGSHOT  
SURREY GU19 5AQ

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

8295941001

4. Title of the invention

METHOD AND APPARATUS FOR DRILLING

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

COHEN, ALAN NICOL  
2 GROVE PLACE  
TATSFIELD  
Nr. WESTERHAM  
KENT  
TN16 2BB

Patents ADP number (if you know it)

6963557001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description

Claim(s)

Abstract

Drawing(s)

25 - 24 please see  
minute.  
11 -  
1 -  
12 + 12

10. If you are also filing any of the following,  
state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right  
to grant of a patent (Patents Form 7/77)

Request for preliminary examination  
and search (Patents Form 9/77)

Request for substantive examination  
(Patents Form 10/77)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

15-08-03

12. Name and daytime telephone number of  
person to contact in the United Kingdom

Alan N. Cohen

01959 577172

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

10/576893

RECEIVED 24 APR 2006

### Method and Apparatus For Drilling

5 The present invention relates to a method for drilling in which tubulars can be added or removed from a drill string whilst the mud is circulating and to apparatus which enables this to be carried out.

10 It is well known in the drilling industry, and particularly in the field of drilling for oil, natural gas and other hydrocarbons, that drill strings comprise a large plurality of tubular sections, hereinafter referred to as "tubulars", which are connected by male threads on the pins and female threads in the boxes. It is also well known that such tubulars must be added to the drill string, one-by-one, or in "stands" of 2 or 3 connected tubulars, as the string carrying the drill bit drills into the ground, a mile or more below ground being common in the oil drilling art. For various reasons during the drilling, and after the borehole has been drilled, it is necessary to withdraw the drill string, in whole or in part. Again, each tubular or stand must be unscrewed, one-by-one, as the drill string is brought up to the extent required.

20 With prior art systems, each time that a tubular is added or removed, it is necessary to stop the drilling process and the circulation of drilling fluid. This presents a costly delay in the overall drilling operation. This is because the circulation of drilling fluids is extremely critical to maintaining a steady down hole pressure and a steady and near constant Equivalent Circulating Density (ECD), as is well known in the drilling art. Also, as is well known, when tripping the drill string into or out of the well, the lack of continuous circulation of a drilling fluid causes pressure changes in the well which increases the probability of "kicks".

30 In addition to the drilling operation, the placement of casings in the bare hole is also necessary. As in the case of tubulars, the placement of casing sections in the prior art presents the same fundamental problems. That is, the flow of drilling fluids must be halted, and the drill string must be withdrawn in its entirety before the casing can be

- 2 -

run into the well, which in some instances requires circulation of fluids and rotation of the casing.

5 In order to overcome these problems, apparatus and methods have been devised to add or remove tubulars with continuous circulation of the drilling mud.

10 Patent Application PCT/GB97/02815 describes a method for drilling wells in which a drill bit is rotated at the end of a drill string comprising tubular members joined together and mud is circulated through the tubular drill string, in which method tubular members are added to or removed from the drill string whilst the circulation of mud continues.

15 The method provides for supplying mud at the appropriate pressure in the immediate vicinity of the tubular connection that is about to be broken, within a pressure chamber or 'coupler', as described in detail below, such that the flow of mud so provided overlaps with the flow of mud from the top drive. As the tubular separates from the drill string, the flow of mud to the separated tubular is stopped, e.g. by the action of a closing device such as a gate valve.

20 The separated tubular can then be flushed out, e.g. with air or water (if under water), depressured, withdrawn, disconnected from the top drive and removed. The action of the blind ram is to divide the coupler into two parts, e.g. by dividing the pressure chamber of the coupler connecting the tubular to the drill string. The drill string continues to be circulated with mud at the required pressure from an annulus  
25 connection below the blind ram.

In a preferred embodiment of the invention a tubular can be added using a clamping means which comprises a snubber, and the top end of the drill string is enclosed in and gripped by the lower section of the coupler, in which coupler there is a blind ram  
30 which separates the upper and lower sections of the coupler. The tubular is then

- 3 -

added to the upper section of the coupler and is sealed by pipe rams and the blind rams are opened and the lower end of the tubular and upper end of the drill string are joined together.

- 5 In use, the lower section of the coupler below the blind rams will already enclose the upper end of the drill string before the tubular is lowered and when the tubular is lowered into the coupler the upper section of the coupler above the blind rams will enclose the lower end of the tubular.
- 10 To contain the drilling fluid, the lower section of the coupler is attached to the top of the suspended drill string, with the blind rams in the closed position preventing escape of circulating drilling fluid. The tubular is lowered from substantially vertically above into the upper section of the coupler and is then sealed in by a seal so that all the drilling fluid is contained. The blind rams are then opened and the tubular
- 15 and the suspended drill string are brought into contact and joined together with the grips bringing the tubular and drill string to the correct torque.

- The lower end of the tubular and the upper end of the drill string are separated by the blind rams such that the tubular can be sealed in by upper pipe rams so that, when the
- 20 blind rams are opened, there is substantially no escape of drilling fluid and the tubular and drill string can then be brought together and made up to the required torque.

- To remove another tubular from the drill string, the extension/saver sub under the top drive penetrates the upper part of the pressure chamber, is flushed out with mud and
- 25 pressured up; the blind rams open allowing the top drive to provide circulating fluid and the extension/saver sub to connect to and to torque up into the drill string. The pressure vessel can then be depressured, flushed with air (or water if under water) and the drill string raised until the next join, or tool joint, is within the pressure chamber, the 'slips and grips' ram closed, the pressure chamber charged with drilling fluid and
- 30 pressured up and the cycle repeated.

Preferably the coupler includes rotating slips which support the drill string while the top drive is raised up to accept and connect another tubular.

- 5 In patent application PCT/GB/03411 the upper grips and slips are able to pass through the blind rams when the blind rams are in the open position.

10 Patent Application PCT/GB01/04803 discloses a coupler and a method for continuously circulating a drilling fluid through a drill string, while adding or removing tubulars has a lower fluid pressure seal adapted to engage a drill string, lower grips adapted to engage a drill string, a valve positioned above said lower grips, upper grips adapted to engage a tubular to be added to or removed from said string and an upper fluid pressure seal adapted to engage said tubular. Patent Application  
15 PCT/GB02/003031 discloses a slips assembly which comprises a plurality of slip segments which, when positioned adjacent to each other, form a collar, which collar is larger than the diameter of the tubular body of the tubular at the top of the drill string and smaller than the diameter at the upset shoulder of the said tubular, there being a segment moving means which can move the segments together to form a collar slidably located around the body of the said tubular, which slips assemblies can  
20 also be utilised in conjunction with, or as part of, the couplers referred to in prior patent applications, either to support, raise or lower the string below, or restrain, lower or raise the tubular, or stand of tubulars above.

25 These methods require the disconnection to be carried out under high pressure and therefore require an element of snubbing to bring the pin and box together. The necessary pressure vessel enclosing the entire tool joint under pressure is in two chambers when separated, resulting in a relatively tall and heavy assembly (of 2 or 3 ram or rotary preventers plus a snubber). This is an operation which cannot be



- 5 -

combined with conventional making and breaking of tool joints in the open by roustabouts using tongs or iron roughnecks.

5 The present invention relates to a connector (hereinafter called a diverter sub) which can be attached to or incorporated in a tubular or tubular string or drill string, which enables tubulars to be added to a drill string whilst there is continuous circulation of mud through the drill string and/or continuous rotation of the drill string.

10 According to the invention there is provided a diverter sub with an inlet and outlet each of which is able to be connected to a drill pipe so as to form a continuous conduit down which mud can be pumped axially, there being a side mud port through which mud can be pumped and a diverter valve mounted within the diverter sub, which diverter valve, in its open position, closes the side mud port and allows mud to be pumped from the inlet down axially through the diverter sub and through the outlet  
15 down the drill pipe and which, in its closed position, closes the inlet and opens the side mud port so that mud can be pumped through the side mud port down through the outlet down the drill pipe. Preferably there is a sealing means around the side mud port.

20 The invention also provides a diverter sub for use in drilling wells comprising (i) connecting means enabling the diverter sub to be connected between two drill pipes so that, in use, mud can be pumped axially down through the diverter sub and down the drill pipe, (ii) a side mud port through which mud can be pumped, (iii) a diverter valve mounted within the diverter sub and (iv) a sealing means which seals around  
25 the side mud port and in which diverter sub the diverter valve, in its open position, closes the side mud port and allows mud to be pumped axially down through the diverter sub and in its closed position closes the diverter sub inlet and opens the side

- 6 -

mud port so that mud can be pumped through the side mud port down through the drill pipe.

5 The invention further provides a method for continuously circulating mud and/or continuously rotating the drill string whilst adding a tubular to a drill string, which method comprises having a diverter sub mounted on the top of the drill string, which diverter sub has a side mud port and a diverting valve means which, in the open position, opens the diverter sub and closes the side mud port and in the closed position opens the side mud port and closes the diverter sub, in which method the  
10 diverting valve means is switched to the closed position, mud is circulated through the side mud port and down the drill string, a tubular is connected to the top of the diverter sub and the diverting valve means switched to its open position and mud is circulated axially through the added tubular and diverter sub and down through the drill string.

15

To remove a tubular the process is reversed.

In the prior art methods of adding or removing tubulars with circulation of the mud it has been necessary to surround the pin and box with a high pressure enclosure. The  
20 present invention enables the tubulars to be added or removed without the enclosure.

The invention further provides a method of adding or removing a tubular to a drill string with continuous circulation of drilling mud and/or continuous rotation of the drill string in which the end of the tubulars which are to be connected or disconnected  
25 are not enclosed in a chamber as they come apart or are connected and/or without having to snub the tubular towards the drill string to achieve closure and/or without having to have any gears or grips or mechanical parts operating in drilling fluids such

- 7 -

as mud and/or having to use special thread lubricants to avoid wash off in the turbulent mud flow.

5 The invention further provides a method of adding or removing tubulars to a drill string in which there is continuous circulation of drilling mud without the need for an enclosure around the end of the tubulars which are to be added or removed, without snubbing against mud pressure, without immersing mechanisms in the mud and without using special thread lubricants.

10 The addition or removal of the tubulars can be carried out without increasing the height required within the drilling rig.

15 Continuous circulation and rotation are possible with this invention, e.g. using the rotary 90° grips in combination with diverter subs, with valves actuated as described herein, installed in the drill string, plus 2 or 3 near standard RBOPs to seal to the exterior of the diverter sub and drill string.

20 By the open position is meant that, when the diverter sub is connected between two tubulars, there is a continuous axial channel between the tubulars and mud can be pumped from one tubular through the diverter sub to the other tubular and in the closed position there is no continuous axial channel from one tubular to the other. Thus the diverter sub has the ability to close off the axial flow of mud flowing downwards from the tubular above or the axial flow of mud flowing upwards to the tubular above.

25

- 8 -

The sealing means seals against the exterior of the diverter sub, around or above and below the said mud port and thereby applies drilling fluid pressure to the exterior of the mud port.

- 5 The diverter sub can be installed in the drill string with a tool joint connection above and below it, such that the diverter sub includes a box above it and a pin below it, or it can be integrated into the top of a drill pipe joint so that it forms part of the drill pipe tool joint box upset.
- 10 In use the diverting valve means opens the mud port in the side of the diverter sub and closes the axial flow from above, which valve means can be passively operated as with non return valves, with or without springs, or actively operated by a mechanical, hydraulic or electrical means.
- 15 Preferably the internal bore of the diverter sub is the same internal diameter as that of the drill pipe, in order to allow free passage of wire-line tools. However, some minimal narrowing of the internal bore may be convenient to accommodate conventional ball, plug, flapper, or non return valve or valves, within the body of the diverter sub, while leaving adequate strength in the diverter sub body.
- 20 In practice the diverter sub can be added to the top of a joint or stand of drill pipe and mud can be supplied at full mud pump pressure via the tubular above or the side mud port to contribute part or all of the circulation of mud down the drill string.
- 25 In operation preferably the opening of the mud port also allows mud to flow in from the mud port to mix with the mud flowing down the drill string from the tubular above and, as the diverting valve means closes, it cuts off the flow of mud from the

- 9 -

tubular above allowing the mud flow down the drill string to emanate substantially from the mud port.

5 The diverting valve means can be a ball, plug or other state-of-the-art valve that maximises the straight-through diameter, preferably to that of the drill string internal diameter, when open to the axial flow.

10 The invention also provides a valve which can be used with the diverter sub. The valve comprises a first inlet and a second inlet and an outlet in which a valve in a first position opens the first inlet and closes the second inlet and, in a second position closes the first inlet and opens the second inlet. Preferably when the valve switches from the first position to the second position for at least part of the said switch, both the first and second inlet are open so flow of fluid from the first and second inlet overlap.

15 Alternatively the valve comprises a shaped surface pivotally mounted in the conduit having a passageway formed, therein the inlet end of said passageway being aligned with the first inlet when the valve is in the first position and aligned with the second inlet when in the second position and in which, in the first and second position, the  
20 outlet of said passageway is aligned with the conduit.

Preferably the curved surface forms the pivotally or axially mounted blade of the valve and the said surface is formed substantially entirely from a section of cylinder, which ensures that, in the open position, this valve blade takes up the minimum  
25 possible wall thickness.

Preferably the shape of the sealing surface of the blade in the closed position, approximates to sections of two ellipses which, when the valve is closed, seal against a ledge cut into the internal wall of the conduit.

- 10 -

In operation, the flows from the first inlet and the second inlet overlap, as the valve blade moves between the first and second positions. The valve may be assisted in its final closing and/or opening by the addition of a spring or springs.

5

When used with an oil drilling string the seals, which can be any state of the art sealing surface, such as metal to metal, chevron seal or 'o' ring, should be capable of withstanding a pressure differential of up to 5,000psi or more. As the actuation mechanism can be washed in returning mud which can contain sand debris etc., the clearances should be able to accommodate this.

10

When used with the diverter sub the valve is located within the diverter sub and can switch from the diverter sub inlet to the side mud inlet with the outlet being aligned with the diverter sub outlet which connects to the drill string.

15

This valve enables full bore axial flow with wall thicknesses that would be inadequate to accommodate a ball valve, by shaping the valve blade, when open, to conform to a section of the cylindrical wall of the diverter sub and yet have a sealing edge, when closed, that matches a sealing surface cut into the internal cylindrical wall of the diverter sub, the valve blade moving through some  $30^0$  to  $90^0$  between open and closed positions depending on the design of actuation.

20

The sealing edge, when closed, preferably matches a sealing surface cut into the internal cylindrical wall of the diverter sub, up to its hinge, which consists of a slice of ball valve, requiring no more wall thickness than the thickness of the valve blade, with the valve blade and ball valve slice moving through significantly less than  $90^0$  between open and closed positions.

25

- 11 -

The actuation of the valve can ensure positive completion of opening or closure, where the valve blade is mechanically moved between open and closed positions by a mechanism that allows the actuation to take place while the string is still rotating, thus allowing for continuous circulation and rotation of the drill string, while  
5 disconnecting tool joints above or within the new device.

The actuation can be by a mechanical, hydraulic or electrical mechanism and can be a rotational, reciprocating or translation motion.

10

When tubulars are to be added or removed with continuous circulation of the drill string, the actuation of the valve should ensure positive completion of opening or closure, where the valve blade is mechanically moved between open and closed positions by a new mechanism that allows the actuation to take place while the string  
15 is still rotating, thus allowing for continuous circulation and rotation of the drill string, while disconnecting tool joints above or within the new device.

The operation of the diverting valve means can be carried out without external mechanical actuation but by the pressures of the two mud sources, such that, once the mud pressure outside the mud port is raised to that of the said tubular, only a small  
20 drop in the tubular pressure or a small increase in the mud port external pressure will open the mud port and cause mud to flow in through the mud port, and with a further decrease in the pressure of the mud in the tubular, the flow of mud will be entirely from the mud port; the reversal of flow between the diverter sub and the tubular  
25 above will cause the diverter sub to shut off this axial flow to the tubular above.

This switching of flows from the tubular above to the mud port can be effected by the related or independent action of two non return valves, one allowing flow downwards from the tubular above and the other allowing flow inwards through the mud port.

- 12 -

Manual override of the diverter sub mechanism is available in the event that the diverter sub does not respond adequately to the differential pressures and complete a satisfactory closure of either the mud port flow or the axial flow.

5

Preferably the diverter valve mechanism within the diverter sub can be securely 'locked' in the open position to avoid accidental opening of the side mud port when the diverter sub is within the well bore. The valve actuator mechanism can both close and open the diverter valve and, by a wedging action, effectively lock the valve in the

10

The sealing means preferably applies mud pressure to the exterior of the mud port by sealing around the mud port or circumferentially around the diverter sub above and below the mud port, and the sealing means is capable of containing mud at full mud pump discharge pressure, typically of up to 5,000 psi or more.

15

The sealing can be a standard or near standard pipe ram preventer, or a rotary preventer, with a double seal, sealing to the diverter sub, above and below the mud port, such that mud can be introduced into the preventer and enter the mud port between the seals irrespective of the azimuth orientation of the mud port.

20

Alternatively the sealing device can be a standard or near standard pipe ram preventer, or rotary preventer with a standard or near standard single seal, sealing to the diverter sub, above the mud port, coupled with a second pipe ram preventer or rotary preventer sealing below the mud port, either to the diverter sub, or to the tool joint box at the top of the next tubular in the drill string below it, or to the body of the next tubular in the drill string below it, thus enclosing the space around the mud port, in which high pressure mud can be supplied to the mud port.

25



- 13 -

In another embodiment the sealing means can be a clamp that clamps around the diverter sub and applies a high pressure seal to the area immediately around or above and below the mud port, the said clamp being either in one assembly, through which  
5 the drill string passes, or split so that it may be withdrawn substantially from the drillstring without having to disconnect the drill string.

Optionally there can be a mechanical shaft, integrated with the device, to actuate the diverter sub mechanism, either as a normal procedure or as an override, if required,  
10 such shaft being capable of manual or machine actuation or the mechanical shaft can be replaced by a hydraulic duct plus a plug, socket or seal to apply hydraulic pressure to the diverter sub to effect the mechanical motion required.

Preferably the diverter sub is not only connected and torqued up to the joint of drill  
15 pipe below but it is locked in place so that it cannot inadvertently disconnect when the connection above it is being disconnected.

A drill string can be assembled with tubulars incorporating a diverter sub of the present invention, e.g. by integrating the diverter sub into the structure of the drill  
20 pipe joint, such that there is no tool joint between the diverter sub and the joint below but the tool joint box of the drill pipe is elongated to accommodate the diverter sub's structure, mechanism and function, between the threaded section of the tool joint box and the shoulder of the upset between the said tool joint box and the body of the drill pipe joint, thus shortening the length of the overall tool joint upset including the  
25 diverter sub.

- 14 -

In an embodiment of the invention, the diverter sub can be capable of stopping circulation by shutting off both the axial flow and the flow from the mud port, at the same time, thereby enabling the drill string to be disconnected at any accessible tool joint, with the drill string beneath remaining closed, such as may be necessary when  
5     disconnecting a drill string in an emergency disconnect above a subsea completion in 'riserless drilling'.

Preferably the diverter sub including its diverter valve is a simple, low cost and highly reliable assembly that can be included in the drill string every 30, 60 or 90 ft or  
10     so to facilitate continuous circulation and/or continuous pressure containment and/or continuous rotation.

Accordingly such a mechanism can consist of a blade, being a section of the cylindrical wall of the diverter sub, being rotated about its pivot by some 45 degrees  
15     by a mechanical link to a cylindrical collar around the outside of the diverter sub. Thereby a differential rotation of the collar in a clockwise direction relative to the diverter sub can close or open the diverter valve; this effectively locks the valve open since the rotation of the drill string and therefore the diverter sub, in the well bore, is invariably clockwise. This actuation may be carried out while the drill string is  
20     continuously rotated since the gripping of the cylindrical collar may be achieved with an RBOP applying a nominal grip and torque provided the RBOP is modified to be motorised and the said drive relates to the rotation of the drill string via a differential gear box that can apply a moderate torque between the diverter sub and the cylindrical collar.

25

Alternatively, to close or open the diverter valve, hydraulic cylinders may be located in the wall of the diverter sub; with the hydraulic pressure being provided on one side of the pistons by the high pressure mud on the outside of the side mud port and the

- 15 -

pressure on the other side of the pistons being atmospheric pressure when the diverter sub is out of the bore hole. Hence the ports to the hydraulic cylinders can be at different levels in the wall of the diverter sub such that the high pressure is provided by high pressure mud and the low pressure is atmospheric pressure. The closing of the diverter valve is only possible if one of the ports is at low pressure and the opening can be assisted by springs so the valve cannot close when in the well bore.

The method of the invention can be used to break and make tool joint connections without interrupting the circulation of mud while applying conventional or new methods to grip the tubular above and the drill string below it and spin the tubular in or out and torque up or untorque the tool joint connection on all types of tubulars and tubular assemblies, without having to snub a tubular into a high pressure space in order to effect a connection or disconnection or make any special provision for the lubrication of the threads, which might be washed off if connected in flowing mud under pressure.

As well as mud, the invention can be used with any fluid introduced down the drill string during the drilling and completion of a well, including but not limited to drilling mud, foam, cement, chemicals, completion fluid, hydrocarbons and water.

The invention can be used with all manner of tubulars and tubular assemblies, including but not limited to drill pipe, casing, liners, tubing, production tubing, macaroni, coiled tubing and tubular assemblies, including but not limited to bit assemblies, bottom hole assemblies, MWD assemblies and production assemblies.

When used subsea, for example on a seabed located drilling rig, the diverter sub may be applied to eliminate the addition of seawater to the drill string in each new stand of drill pipe, or mud into the sea in each stand withdrawn from the well bore; the

- 16 -

diverter sub may include a second port to flush out the tubular above of seawater before adding to the string or mud when removing the stand from the string, or a second diverter sub may be connected or integrated with the lower end of each tubular or stand of tubulars being added to or removed from the drill string.

5

The diverter sub of the present invention can be used to replace the need for installing flapper valves, non return valves or check valves in the drill string and enable the bottom hole assembly to be extracted completely through a pair of pipe ram or rotating preventers, while maintaining wellhead pressure above or below ambient as

10

In use the diverter sub can be pre-connected to the top of each joint or stand of drill pipe. The drill string is supported in slips in the centre of the drill floor; the sealing device seals around the diverter sub mud port so that, when the diverter sub flow is diverted, the Top Drive or drill pipe above can be disconnected without interrupting the flow of mud down the drill string.

15

The tool joint connections can be made conventionally above the diverter sub and sealing device, with or without an iron roughneck. The diverter sub increases the height of a stand of drill pipe by less than about 2 ft. and the sealing device is small enough to be accommodated on most rig floors. The height of the diverter sub, e.g. of some 2 ft, fits in easily above the rotary table.

20

It is a feature of the invention that it enables there to be continuous circulation of drilling fluids while a tool joint in the drill string is disconnected, without enclosing the said tool joint in a pressure vessel. Additionally the invention does not require snubbing and the equipment is short enough in height to allow conventional tool joint

25

- 17 -

connections to be made above it, with or without the assistance of an iron roughneck and it is small enough to fit on most drilling rigs.

The invention is illustrated in the accompanying drawings in which:-

- 5 Fig. 1 shows a cross section elevation of the diverter sub in use with the tool joint disconnected.

Fig. 2 shows a diverter sub with ball valve insert, connected to the top of a drill pipe and an alternative of integrating the diverter sub into the tool joint box of the drill pipe.

- 10 Fig. 3 shows the diverter sub in use as a diverter on the bottom end of a drill pipe, not for continuous circulation but to allow the joint or stand of tubulars above to be drained or flushed out through the mud port as may be required on a seabed rig and/or with certain valuable or harmful drilling fluids.

- 15 Fig. 4 illustrates the actuation of a conventional ball valve requiring lateral shaft access.

Fig. 5 illustrates the actuation of a new cone valve requiring diagonal shaft access.

Fig. 6 illustrates the possibility of achieving full bore access using a ball valve.

Fig. 7 illustrates the possibility of achieving full bore access using a cone valve.

Fig. 8 shows a flapper valve useful in the invention.

- 20 Fig. 9 shows options for the external sealing unit, as a standard ram preventer with double seals or a more mobile clamping unit, which splits for removal when not required.

Fig. 10 shows options for the internal valve units to preserve full bore passage through the diverter sub, for passing wireline tools.

- 18 -

Fig. 11 shows options for double valving to facilitate draining or flushing of the tubulars above the diverter sub, before tool joint connections and/or after tool joint disconnections.

5 Fig. 12 shows a combination of 'ball' and 'flapper' design that allows full bore axial flow but does not require the wall thickness that a ball valve requires.

Fig. 13 shows a 'flapper' type of valve that allows full bore axial flow and arguably requires the minimum possible wall thickness.

Fig. 14 shows the application of the diverter sub in a situation where continuous rotation was required as well as continuous circulation.

10 Fig. 15 shows the inclusion of hydraulic cylinders within the thickest section of wall of the diverter sub, providing positive closing and opening, suitable for continuous circulation and rotation.

Fig. 16 illustrates one method of wedging the valve open to the axial flow and closed to the side mud port.

15

Referring to Fig. 1, the diverter sub (1) is pre-connected to the top of each joint or stand of drill pipe. In use, the drill string (2) is supported in the slips (3) in the centre of the drill floor (4); a sealing device (5) seals around the diverter sub mud port (6), so that, when the diverter sub flow is diverted (7), the Top Drive or drill pipe (8)

20 above can be disconnected without interrupting the flow of mud down the drill string. The tool joint connections can be made conventionally at (9), above the diverter sub and sealing device, with or without an iron roughneck. The diverter sub (1) increases the height of a stand of drill pipe by less than about 2 ft. and the sealing device (5) is small enough to be accommodated on most rig floors.

25

Referring to Fig. 2, the diverter sub (11) can be fabricated as a 'stand alone' device that contains a valve unit such as a ball valve unit as shown (12) and is pre-connected

- 19 -

to the top of a drill pipe (13) at the tool joint (14), with the pin (15) of the diverter sub screwed into and torqued up to the box (16) of the drill pipe tool joint. This connection is to be locked in place by any one of a number of prior art methods so that the connection is not broken inadvertently when the diverter sub box (17) is to be  
5 disconnected from the pin of the tubular above. Fig. 2 also shows a more compact version, wherein the diverter sub is integrated with the tool joint box of the drill pipe joint below. In the unusual event that the pins in the drill string were facing upwards, the diverter sub can be assembled with the pin and box reversed.

10 Referring to Fig. 3, the diverter sub (21) can also be used to divert the flow at the base of the tubular (22) above, not to achieve continuous circulation but to facilitate draining the mud from the tubular before disconnecting it from the drill string and removing it to storage or to prime the tubular with mud before connecting it to the drill string. In subsea use, as on a seabed located drilling rig, this capability ensures  
15 that the escape of mud into the surrounding seawater and/or the introduction of seawater into the mud is minimised. Fig. 3 also shows a more compact version, wherein the diverter sub is integrated with the tool joint pin of the drill pipe joint above.

20 Referring to Fig. 4, the actuation of the diverter sub valve may be by external mechanical or hydraulic means. The ball valve (42) shown is most easily actuated by inserting a shaft into the socket (43), having already penetrated the wall of the diverter sub (41). The actuation shaft may be integrated with the external sealing device (44). Orientation of the diverter sub (41) will be necessary to bring the ball  
25 valve socket opposite to the said shaft, or the sealing device can be rotated to align with the ball valve socket. The sealing device (44) can be a pipe ram preventer with a special double seal (45) such that there is formed an annular space (46), which can be filled with mud at full mud pump pressure.

- 20 -

Referring to Fig. 5, the new cone valve (52) shown may more economically use the space to facilitate a larger internal diameter within the limited external body of the diverter sub (51). The cone valve having a near perfect smooth internal cylindrical surface when allowing axial flow, within a narrowing bore, having a venturi shape (53) to minimise dynamic (or friction) pressure drop. The shaft (54) to rotate the cone valve may exit the diverter sub (51) at an angle to the vertical, such that it may avoid having to penetrate the sealing device (55).

Fig. 6 illustrates an ideal integration of ball valve (62) and diverter sub (61) to use the thick walled diverter sub to maximum advantage; state of the art fabrication and assembly methods for down hole components will facilitate this fabrication. Where full bore axial flow is required, the use of ball valve, as shown in Figs. 1 and 6, is restricted to diverter subs where the wall thickness is significantly greater than 25% of the internal diameter; generally, the diverter sub will conform to the wall thickness and internal diameter of the tool joint, and so, for many applications, the wall thickness will be inadequate to accommodate a ball valve. A lesser wall thickness is required for the new cone valve design in Fig. 7 and an even smaller wall thickness is required for the new valve designs shown in Figs. 11, 12 and 13.

20

Fig. 7 illustrates the ideal application of the cone valve (72). The width of the cone across the diverter sub is wider in the direction perpendicular to the drawing and the sealing surface is conical in both the axial flow and mud port directions but the design is still more economical on space than the ball valve.

25

Fig. 8 illustrates a new type of flapper valve (82), which provides a full bore aperture during axial flow. This does not require mechanical actuation but responds to the predominant pressure and flow. When the pressure at (83) exceeds the pressure at



- 21 -

(84) the flapper valve opens the mud port at (83) to allow inward flow. If the pressure at (84) is reduced further, the flapper valve (82) closes off the axial flow entirely. Springs (85) may be added to increase positive closure in either or both directions.

- 5 Fig. 9 shows a diverter sub (91) in use in a drilling rig. In use, the diverter sub (91) is connected and locked to, or integral with, the drill string (92), which is shown supported in the slips (93) in the centre of the drill floor (94). A sealing device (95) seals around the diverter sub mud port (96), so that, when the diverter sub flow is diverted (97), the flow of mud to the drill string can be supplied via the mud port
- 10 (96). With the mud diverted, the tool joint box (98) can be gripped by lower tongs or lower jaws of an iron roughneck (99) and the Top Drive sub or tubular above (100) can be disconnected by upper tongs or upper jaws of an iron roughneck (102) gripping the pin upset (101). The tool joint connections can thereby be made conventionally above the diverter sub and sealing device, with or without an iron
- 15 roughneck. The diverter sub (91) increases the height of a stand of drill pipe by less than about 2 ft. and the sealing device (95) is small enough to be accommodated on most rig floors and its structure and operation can be integrated with that of an iron roughneck.
- 20 Fig 10 shows two options for the design of the sealing device, where, instead of using a standard pipe ram preventer, as described previously, a hinged clamp (110) may be secured around the diverter sub (111) forcing the sealing element (112) against the diverter sub, by mechanically or hydraulically closing the clamp at (113) with the actuation shaft (114) of the diverter sub valve passing through the clamp at (114) to
- 25 engage and rotate the socket (115) of the said ball valve. The mud can be supplied at (116) into the annular space (117) around the diverter sub and into the mud port at (118). This allows the mud port to receive mud regardless of its azimuth orientation but the clamping force is significant. Alternatively the clamp may be an open jaw structure, wherein the structural component (121) carrying the sealing element (122)

- 22 -

is mechanically or hydraulically forced out of the structure (123) and against the side of the diverter sub (124) and the sealing element (122) seals directly around the mud port (123). This requires a lower clamping force and leaves the diverter sub ball valve socket (125) easily accessible for actuating.

5

Fig. 11 shows a design for a double valve diverter sub (131), integrated into the tool joint box (132) of the top joint of the drill string (133). While drilling, the diverter sub valves (134) are open to axial flow at full bore, to allow passage of wireline tools. Before disconnecting the Top Drive sub, or other tubular above (132), both valves are  
10 rotated; firstly the lower valve (132) is rotated to allow mud to flow down the drill string (133) from the mud port (134) and then the mud supply to the Top Drive is closed and the upper valve (135) is opened to drain the Top Drive sub or tubular above (132) before disconnecting it.

15 Fig. 12 shows a new diverter valve design (141), suitable for the diverter sub (140), in the open and closed positions. The design combines the functions and benefits of the ball and flapper types of valve, in which the upper part (142) operates like a ball valve and the lower part (143) acts like a flapper valve or one half of a butterfly valve. Since the valve (141) needs only to rotate a small amount, considerably less  
20 than  $90^0$ , to operate fully, the upper part (142) needs only to be a slice of a conventional ball valve. Additionally, because the lower part (143) conforms in shape to a section of a cylinder, it fits into the wall of the diverter sub (120), when open to allow full bore axial passage. When in the closed position the lower part (143) seals against a ledge (144) cut away in the internal wall of the diverter sub (140), the  
25 sealing surface (145) of the lower part being a section of an ellipse or similar figure in overall shape. The side mud port (145) opens before the diverter valve inlet closes thus overlapping the supply of mud to the drill string. The seals at (146), (147) and (148) being any state of the art sealing surface, such as metal to metal, chevron seal or 'o' ring, capable of withstanding a pressure differential of up to 5,000psi or more.

- 23 -

Fig. 13 shows a new type of flapper valve (151) suitable for use in a diverter sub (150) in which the valve blade (152) is formed entirely from a section of cylinder, which ensures that, in the open position, this valve blade takes up the minimum possible wall thickness. The shape of the sealing surface of the blade in the closed position, approximates to sections of two ellipses (153) and (154), which, when the flapper valve is closed, seal against a ledge (155) cut into the body of the diverter sub (150). In operation, the flows from the inlet (156) and the mud port (157) overlap, as the valve blade moves between the open and closed positions shown. The valve may be assisted in its final closing and/or opening by the addition of a spring or springs at (158). The seals at (159) and (160) being any state of the art sealing surface, such as metal to metal, chevron seal or 'o' ring, capable of withstanding a pressure differential of up to 5,000psi or more.

Fig. 14 shows one method of using the diverter sub (161) in such a way that continuous rotation as well as continuous circulation could be achieved. The blade (162) of the diverter valve is shown in the open position; it is opened and closed positively by the action of the axle (163) being turned through  $90^0$  by the connecting rod (164) which is raised and lowered by a screw thread within the cylindrical collar (165). As the cylindrical collar (165) is gripped by jaws at (166), it can be made to rotate about the body of the diverter sub (161) and thereby screw the connecting rod (164) up and down. In use the cylindrical collar (165) would rotate clockwise (looking downwards) to open the side mud port and close the axial flow and so it would not inadvertently do so during normal drilling, which normally involves clockwise rotation of the drill string. In addition to this positive action, the method allows for the making and breaking of tool joint connections by gripping and rotating the pin (167) and box (168) at different speeds. The jaws (166) need only apply a nominal pressure, enough to turn the cylindrical collar (165) relative to the diverter sub (161) and these jaws are preferably the sealing surfaces of an RBOP (Rotary

- 24 -

Blow Out Preventer). Hence the RBOP at (166) may combine with an upside-down RBOP at (169) to provide a pressure hull to convey mud at up to 5,000psi or more to the mud port (170). Alternatively, the RBOP may be omitted at (169) and an RBOP at (166) may be combined with a conventionally located RBOP at (171) to provide a pressure vessel that contains the mud but has to include the slips unit (172). The relative rotary motion between the pin at (167) and box at (168) can be achieved with rotary 90° grips as has been described in Patent PCT/GB2003/001410. The torquing and untorquing of the tool joint connection may be conveniently achieved by including a differential gear box between the drives to the grippers at (167) and (168). The grips at (173) are conventionally used to spin the pin (167) in or out of the box (168) but may be omitted if rotary grips are used at (167).

Fig. 15 shows the valve blade (180), which is shaped to be a section of a cylinder as seen in View BB, being actuated by hydraulic cylinders (181) located in the thickest section of the wall of the Diverter Sub (182). The connection between the piston rod (183) and the blade (180) is via a lug at (184) within a slot (185), such that the lug (184) must move vertically with the piston (183) but may slide sideways in the slot (185) as the blade (180) rotates about its pivot (186). High pressure mud at (188) can be applied at (187) and thereby force the piston upwards against a spring (189), provided that the pressure at (190) is low, such as atmospheric pressure.

Fig. 16 shows how the slot, (185) in Fig. 15, may be altered to (191) in Fig. 16, to provide a wedging action to ensure that, as the slot (191) moves downwards, the lug (192) is pushed in the direction of closing the side mud port (188). When the slot (191) moves upwards, the lug moves to the left as the valve closes and back to position (193) when the valve is closed and the piston (183) transmits force on the lug at (193) in the upwards direction to keep the valve closed. The wedging action of the slot (191) is assisted by the reaction of the diverter sub body at (194) against which the slot unit (195) slides.

- 25 -

## Claims

1. A diverter sub with an inlet and outlet each of which is able to be connected to a drill pipe so as to form a continuous conduit, down which mud can be pumped axially, there being a side mud port through which mud can be pumped and a diverter valve mounted within the diverter sub, which diverter valve, in its open position, closes the side mud port and allows mud to be pumped from the inlet down axially through the diverter sub and through the outlet down the drill pipe and which, in its closed position, closes the inlet and opens the side mud port so that mud can be pumped through the side mud port down through the outlet down the drill pipe.
2. A diverter sub as claimed in claim 1 in which there is a sealing means around the side mud port.
3. A diverter sub as claimed in claim 1 comprising (i) connecting means enabling it to be connected between two drill pipes so that, in use, mud can be pumped axially down through the diverter sub and down the drill pipe, (ii) a side mud port through which mud can be pumped, (iii) a diverter valve mounted within the diverter sub and (iv) a sealing means which seals around the side mud port and in which diverter sub the diverter valve, in its open position, closes the side mud port and allows mud to be pumped axially down through the diverter sub and in its closed position closes the diverter sub and opens the side mud port so that mud can be pumped through the side mud port down through the drill pipe.
4. A diverter sub as claimed in claim 2 or 3 in which the sealing means seals against the exterior of the diverter sub, around or above and below the said mud port and thereby can apply drilling fluid pressure to the exterior of the mud port.

- 26 -

5. A diverter sub as claimed in any one of claims 2 to 4 in which the sealing means applies mud pressure to the exterior of the mud port by sealing around the mud port or circumferentially around the diverter sub above and below the mud port, and the
- 5 sealing means is capable of containing mud at full mud pump discharge pressure.
6. A diverter sub as claimed in any one of claims 2 to 5 in which the sealing means is a standard or near standard pipe ram preventer, or a rotary preventer, with a double seal, sealing to the diverter sub, above and below the mud port, such that mud can be
- 10 introduced into the preventer and enter the mud port between the seals irrespective of the azimuth orientation of the mud port.
7. A diverter sub as claimed in any one of claims 2 to 5 in which the sealing means is a standard or near standard pipe ram preventer, or rotary preventer with a standard or
- 15 near standard single seal, sealing to the diverter sub, above the mud port, coupled with a second pipe ram preventer or rotary preventer sealing below the mud port, either to the diverter sub, or to the tool joint box at the top of the next tubular in the drill string below it, or to the body of the next tubular in the drill string below it, thus enclosing the space around the mud port, in which high pressure mud can be supplied
- 20 to the mud port.
8. A diverter sub as claimed in any one of claims 2 to 5 in which the sealing means is a clamp that clamps around the diverter sub and applies a high pressure seal to the area immediately around or above and below the mud port, the said clamp being
- 25 either in one assembly, through which the drill string passes, or split so that it may be withdrawn substantially from the drillstring without having to disconnect the drill string.

- 27 -

9. A diverter sub as claimed in any one of the preceding claims in which the valve means is passively operated with or without springs, or is actively operated by a mechanical, hydraulic or electrical means.

5 10. A diverter sub as claimed in any one of the preceding claims in which the internal bore of the diverter sub is the same internal diameter as that of the drill pipe.

11. A diverter sub as claimed in any one of the preceding claims in which the valve means is a ball, plug or other valve.

10

12. A diverter sub as claimed in any one of the preceding claims in which the diverting valve means is operated by the pressures of the two mud sources, such that, once the mud pressure outside the mud port is raised to that of the tubular to which the diverter sub is connected, only a small drop in the tubular pressure or a small increase in the mud port external pressure will open the mud port and cause mud to flow in through the mud port, and with a further decrease in the pressure of the mud in the tubular, the flow of mud will be entirely from the mud port; the reversal of flow between the diverter sub and the tubular above will cause the diverter sub to shut off this axial flow to the tubular above.

15

20

13. A diverter sub as claimed in any one of the preceding claims in which there are two non return valves, one allowing flow downwards from the tubular above and the other allowing flow inwards through the mud port to enable the switching of flows from the tubular above to the mud port to be effected by the related or independent action of the two non return valves.

25

14. A diverter sub as claimed in any one of claims 2 to 13 in which the sealing means is a mechanical shaft, integrated with the device, to actuate the diverter sub

- 28 -

mechanism, either as a normal procedure or as an override if required, such shaft being capable of manual or machine actuation.

5 15. A diverter sub as claimed in any one of the preceding claims in which the sealing means is a hydraulic duct plus a plug, socket or seal to apply hydraulic pressure to the diverter sub to effect the mechanical motion required.

10 16. A diverter sub as claimed in any one of the preceding claims in the diverting valve means is capable of stopping circulation by shutting off both the axial flow and the flow from the mud port, at the same time.

17. A diverter sub as claimed in any one of the preceding claims in which there is a spring to assist in closing off the mud port flow and/or the axial flow.

15 18. A diverter sub as claimed in any one of the preceding claims in which there is a mechanical connection to allow manual override of the diverter sub mechanism in the event that the diverter sub does not respond adequately to the differential pressures and complete a satisfactory closure of either the mud port flow or the axial flow.

20 19. A tubular having a diverter sub as claimed in any one of the preceding claims attached to or incorporated at one end of the tubular.

20. A tubular as claimed in claim 19 in which the diverter sub is locked in place so that it cannot inadvertently disconnect.

25



- 29 -

21. A drill string having a diverter sub as claimed in any one of claims 1 to 18 installed in the drill string with a tool joint connection above and below it, such that the diverter sub includes a box above it and a pin below it.
- 5     22. A drill string having a diverter sub as claimed in any one of claims 1 to 18 integrated into the top of a drill pipe joint so that it forms part of the drill pipe tool joint box upset.
- 10    23. A drill string assembled with tubulars incorporating a diverter sub as claimed in any one of claims 1 to 18.
- 15    24. A drill string as claimed in claim 23 in which the diverter sub is incorporated by integrating the diverter sub into the structure of the drill pipe joint, such that there is no tool joint between the diverter sub and the joint below but the tool joint box of the drill pipe is elongated to accommodate the diverter sub's structure, mechanism and function, between the threaded section of the tool joint box and the shoulder of the upset between the said tool joint box and the body of the drill pipe joint.
- 20    25. A method for continuously circulating mud whilst adding a tubular to a drill string which method comprises having a diverter sub mounted on the top of the drill string, which diverter sub has a side mud port and a diverting valve means which, in the open position opens the diverter sub and closes the side mud port and in the closed position opens the side mud port and closes the diverter sub, in which method the diverting valve means is switched to the closed position, mud is circulated through the side mud port and down the drill string, a tubular is connected to the top of the diverter sub and the diverting valve means switched to its open position and mud is circulated axially through the added tubular and diverter sub and down through the drill string.
- 25

- 30 -

26. A method as claimed in claim 25 in which there is a sealing means around the side mud port which seals against the exterior of the diverter sub, around or above and below the said mud port and thereby applies drilling fluid pressure to the exterior of the mud port.
27. A method for drilling wells, in which a drill bit is rotated at the end of a drill string comprising tubular members joined together and drilling fluid (mud) is circulated through the tubular string, in which method tubular members are added to or removed from the drill string whilst circulation of mud continues, in which method a diverter sub is added to the top of a joint or stand of drill pipe, the said sub having a mud port in its side through which mud can be supplied at full mud pump pressure to contribute part or all of the circulation of mud down the drill string, the diverter sub having the ability to close off the axial flow of mud flowing downwards from the tubular above or the axial flow of mud flowing upwards to the tubular above.
28. A method as claimed in any one of claims 25 to 27 in which the flow of mud is from the tubular above the diverter sub, the mud port is opened to allow mud to also flow in from the mud port and to mix with the mud flowing down the drill string from the tubular above.
29. A method as claimed in any one of claims 25 to 28 in which the diverter sub shuts off the flow of mud from the tubular above and allows the mud flow down the drill string to emanate substantially from the mud port.
30. A method as claimed in any one of claims 25 to 29 in which the valve means is passively operated with or without springs, or is actively operated by a mechanical, hydraulic or electrical means.

- 31 -

31. A method as claimed in any one of claims 25 to 30 in which the internal bore of the diverter sub is substantially the same internal diameter as that of the drill pipe.

5 32. A method as claimed in any one of claims 25 to 31 in which the diverting valve means is operated by the pressures of the two mud sources, such that, once the mud pressure outside the mud port is raised to that of the tubular to which the diverter sub is connected, a small drop in the tubular pressure or a small increase in the mud port external pressure will open the mud port and cause mud to flow in through the mud  
10 port, and with a further decrease in the pressure of the mud in the tubular, the flow of mud is entirely from the mud port; the reversal of flow between the diverter sub and the tubular above causing the diverter sub to shut off this axial flow to the tubular above.

15 33. A method as claimed in any one of claims 25 to 32 in which there are two non return valves, one allowing flow downwards from the tubular above and the other allowing flow inwards through the mud port to enable the switching of flows from the tubular above to the mud port to be effected by the related or independent action of the two non return valves.

20 34. A method as claimed in any one of claims 25 to 33 in which the sealing means is a mechanical shaft, integrated with the device, to actuate the diverter sub mechanism, either as a normal procedure or as an override if required, such shaft being capable of manual or machine actuation.

25 35. A method as claimed in any one of claims 25 to 34 in which the sealing means is a hydraulic duct plus a plug, socket or seal to apply hydraulic pressure to the diverter sub to effect the mechanical motion required.

- 32 -

36. A method as claimed in any one of claims 25 to 35 in which the diverter sub is capable of stopping circulation by shutting off both the axial flow and the flow from the mud port, at the same time.

5

37. A method as claimed in any one of claims 25 to 36 in which there is a mechanical connection to allow manual override of the diverter sub mechanism in the event that the diverter sub does not respond adequately to the differential pressures and complete a satisfactory closure of either the mud port flow or the axial flow.

10

38. A method for drilling wells as claimed in any one of claims 25 to 37, in which a drill bit is rotated at the end of a drill string, the drill string being as claimed in any one of claims 21 to 24 and in which drilling fluid (mud) is circulated through the drill string, and a tubular is added by closing the diverting valve means to close off the axial flow of drilling fluid down the diverter and pumping mud through the mud port down the drill string, adding a tubular to the top of the diverter sub and closing the mud port so mud is pumped through the added tubular axially through the diverter and down the drill string.

15

20

39. A method of adding or removing a tubular to a drill string with continuous circulation of drilling mud and/or continuous rotation of the drill string in which the end of the tubulars which are to be connected or disconnected are not enclosed in a chamber as they come apart or are connected and/or without having to snub the tubular towards the drill string to achieve closure and/or without having to have any gears or grips or mechanical parts operating in drilling fluids such as mud and/or without having to have special thread lubricants to avoid wash-off by turbulent mud.

25

- 33 -

40. A method of adding or removing tubulars to a drill string in which there is continuous circulation of drilling mud without the need for an enclosure around the end of the tubulars which are to be added or removed, without snubbing against mud pressure, without immersing mechanisms in the mud and without using special thread lubricants.
- 5
41. A method as claimed in claim 40 or 41 in which the tubulars are connected and disconnected using the method of any one of claims 25 to 38.
- 10
42. A method as claimed in any one of claims 25 to 41 in which the tubulars are added or removed during rotation of the drill string.
43. A valve which comprises a first inlet and a second inlet and an outlet in which a valve in a first position opens the first inlet and closes the second inlet and, in a second position closes the first inlet and opens the second inlet.
- 15
44. A valve as claimed in claim 43 in which, when the valve switches from the first position to the second position, for at least part of the said switch, both the first and second inlet are open so flow of fluid from the first and second inlet overlap.
- 20
45. A valve as claimed in claim 43 or 44 in which the curved surface forms the blade of the valve.
- 25
46. A valve as claimed in claim 45 in which the said surface is formed substantially entirely from a section of cylinder, which ensures that, in the open position, this valve blade takes up the minimum possible wall thickness.

- 34 -

47. A valve as claimed in any one of claims 44 to 46 in which the shape of the sealing surface of the blade in the closed position, approximates to sections of two ellipses which, when the valve is closed, seal against a ledge in the conduit.

5 48. A valve as claimed in any one of claims 43 to 47 in which the valve blade moves between the open and closed positions and the valve is assisted in at least part of its opening and closing by the action of a spring or springs.

10 49. A valve as claimed in any one of claims 43 to 48 in which there are seals on the sealing surface of the valve blade which are capable of withstanding a pressure differential of up to 5,000psi or more.

50. A diverter sub as claimed in any one of claims 1 to 18 in which the said diverter valve is a valve as claimed in any one of claims 43 to 49.

15

51. A diverter sub as claimed in claim 50 in which the valve blade, when open, conforms to a section of the cylindrical wall of the diverter sub and has a sealing edge, when closed, that matches a sealing surface cut into the internal cylindrical wall of the diverter sub, the valve blade moving through some 30° to 90° between open and closed positions.

20

52. A diverter sub as claimed in claim 51 in which the sealing edge, when closed, matches a sealing surface cut into the internal cylindrical wall of the diverter sub, up to its hinge, which consists of a slice of ball valve, requiring no more wall thickness than the thickness of the valve blade, with the valve blade and ball valve slice moving through less than 90° between open and closed positions.

25

- 35 -

53. A diverter sub as claimed in claimed in claims 50 to 52 in which the diverter valve is actuated and/or locked by externally applied mechanical, hydraulic or electrical means, for example by a rotating slidable cylindrical collar around the diverter sub, or by hydraulic pressure applied to the exterior of the diverter sub or by  
5 a strong magnetic field around the diverter sub.

54. A tubular as claimed in claim 19 or 20 in which the diverter sub is as claimed in any one of claims 50 to 53.

10 55. A drill string as claimed in any one of claims 21 to 24 in which the diverter sub is as claimed in any one of claims 50 to 53.

- 36 -

### Abstract

- 5 Apparatus and a method for adding and removing tubulars whilst containing the pressure within a drill string and/or maintaining circulation of drilling fluid down a drill string using a diverter sub which is able to open up to mud flow from a side mud port and close off the flow of mud from above the drill string with or without continuous rotation of the drill string.

10

**THIS PAGE BLANK (USPTO)**



1/12

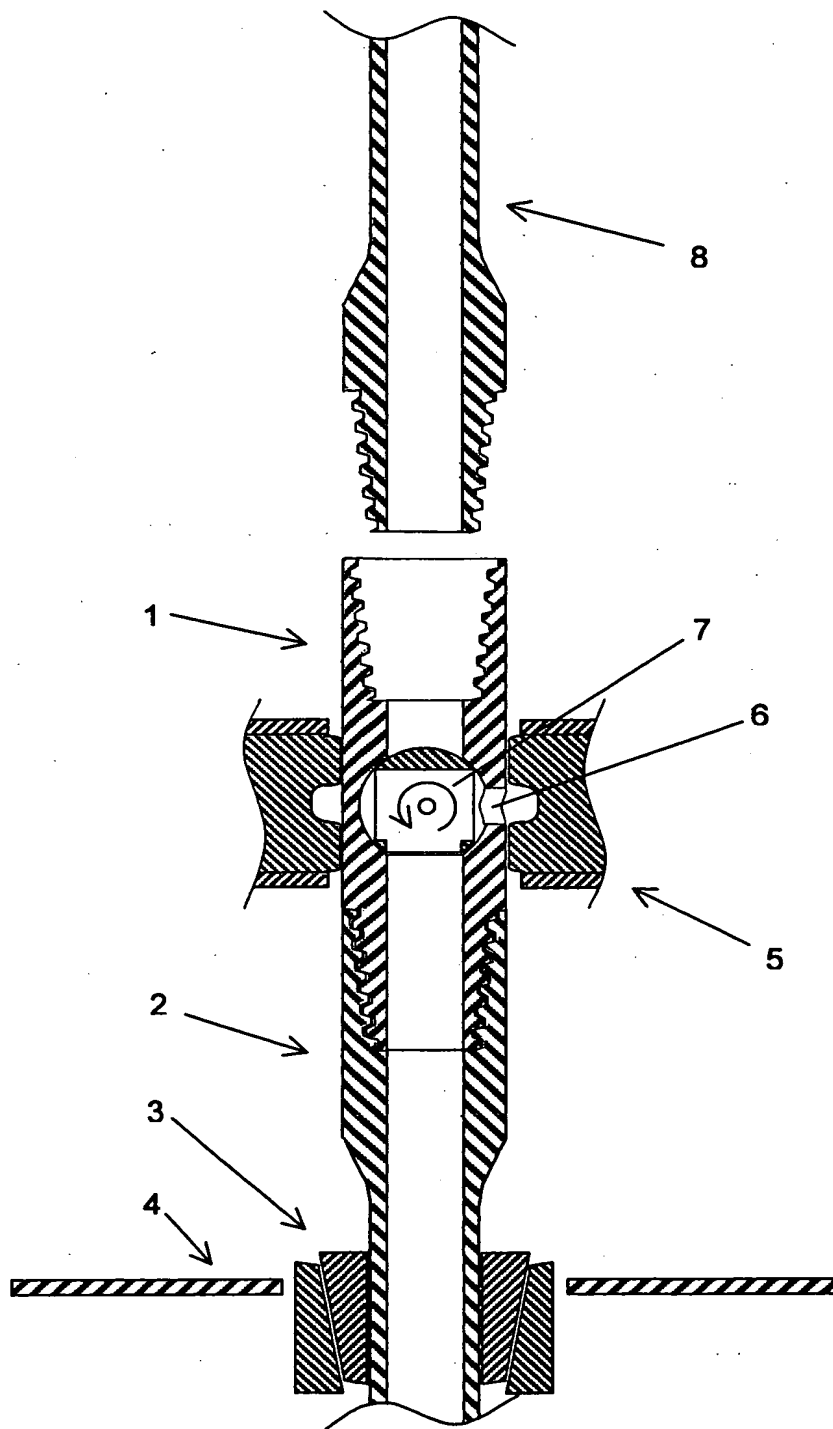


Fig. 1

Not to scale

**THIS PAGE BLANK (USPTO)**

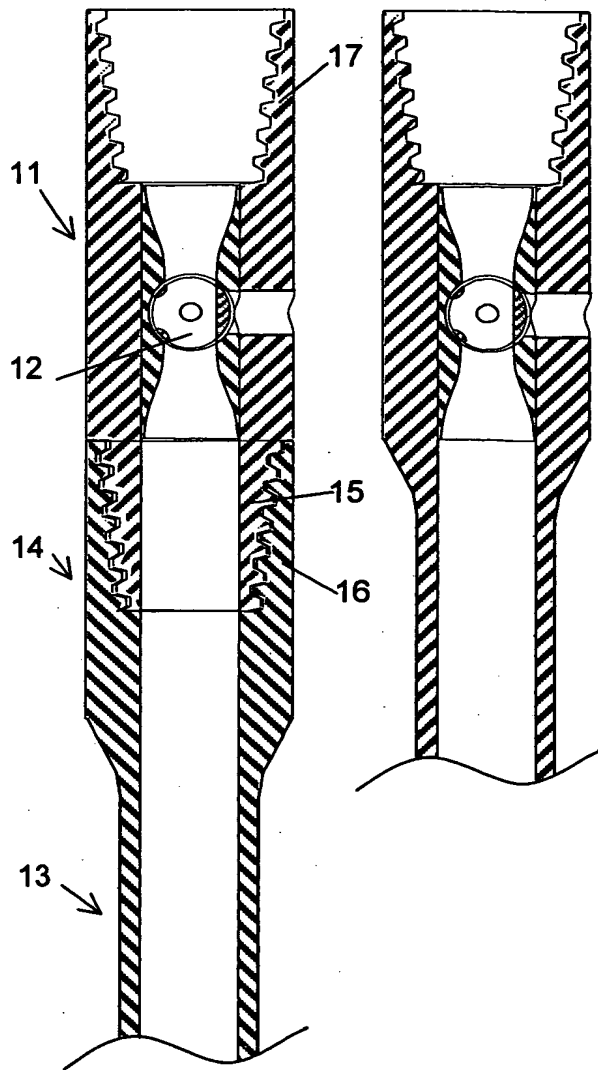


Fig. 2

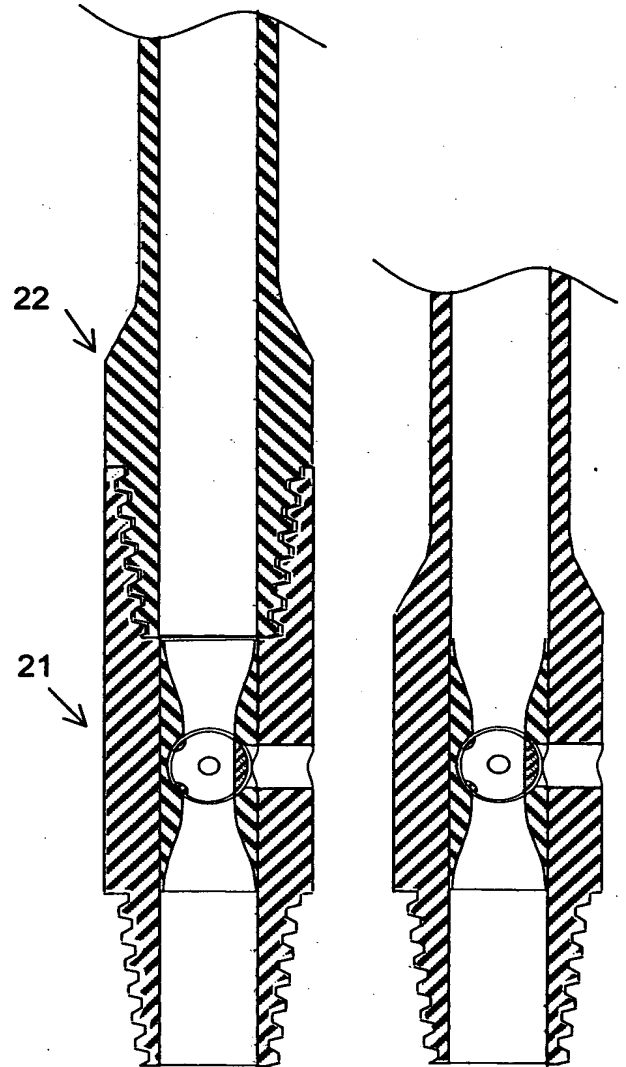


Fig. 3

Not to scale

**THIS PAGE BLANK (USPTO)**

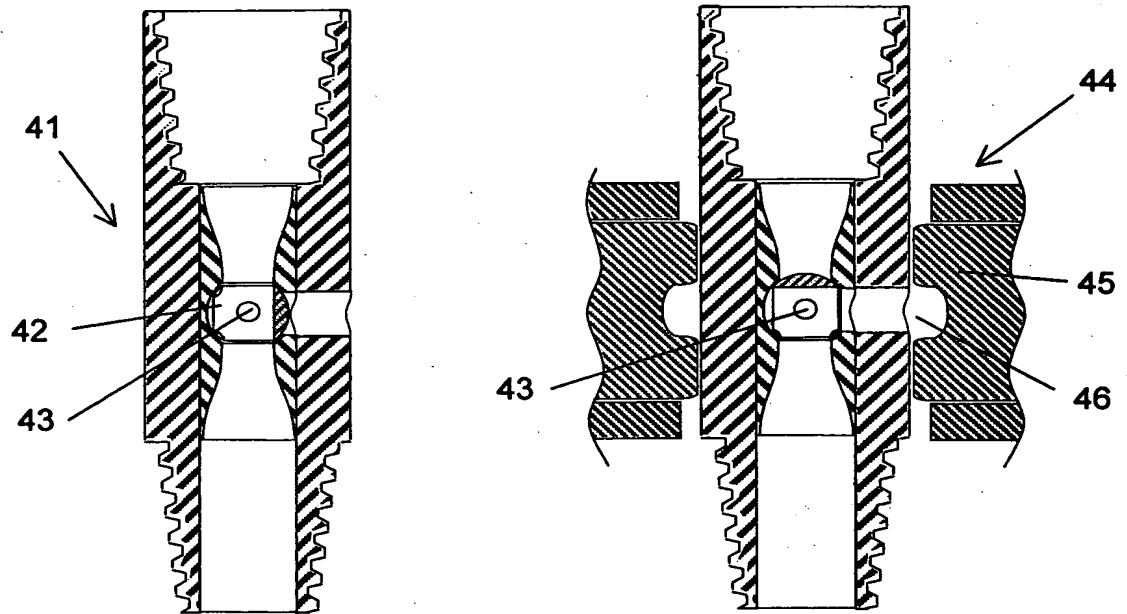


Fig. 4

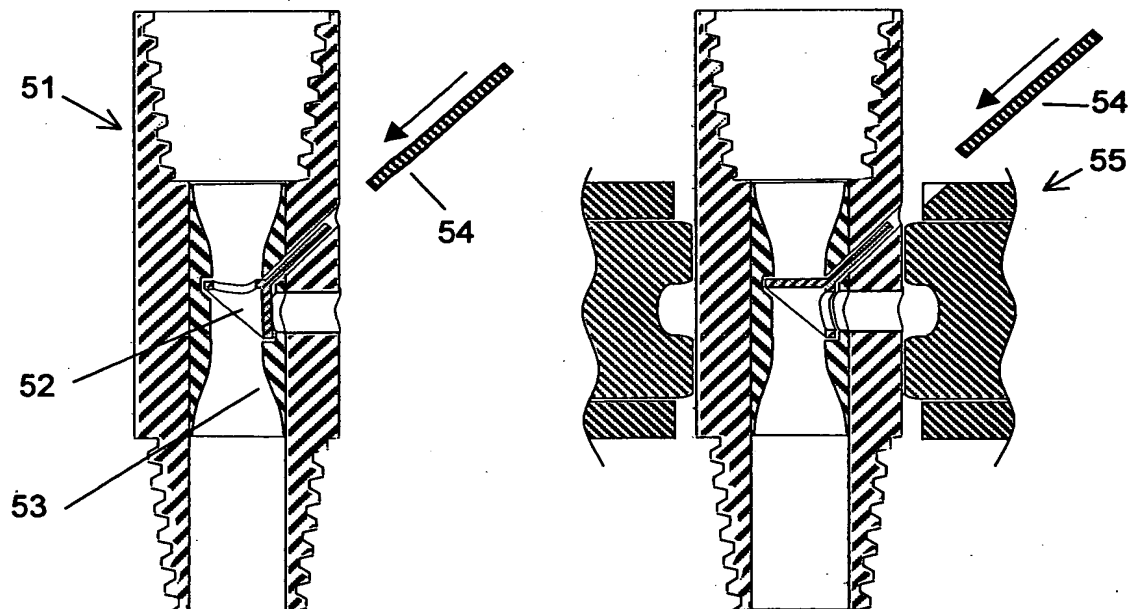


Fig. 5

Not to scale

**THIS PAGE BLANK (USPTO)**

4/12

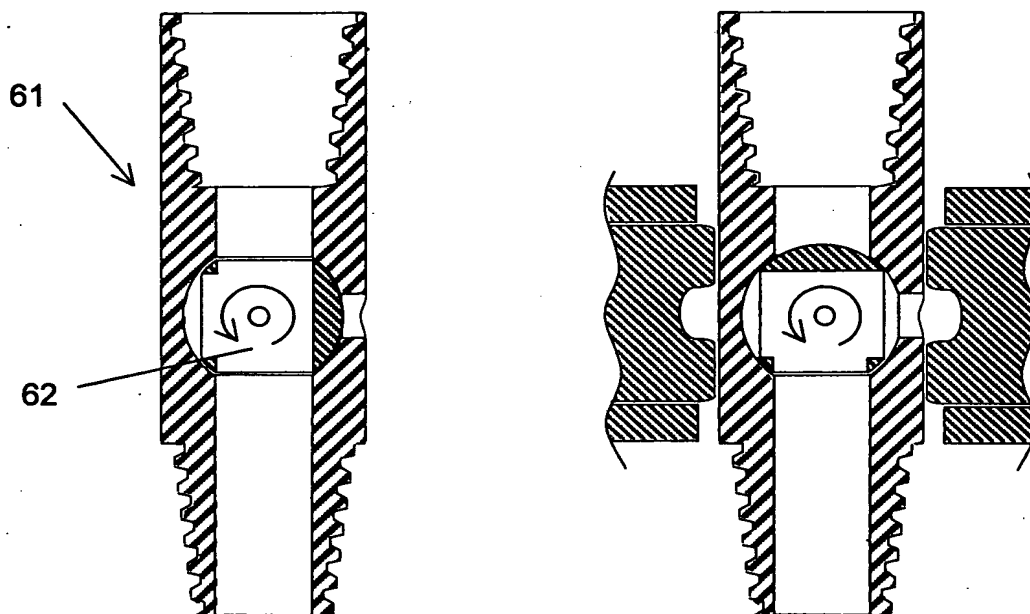


Fig. 6

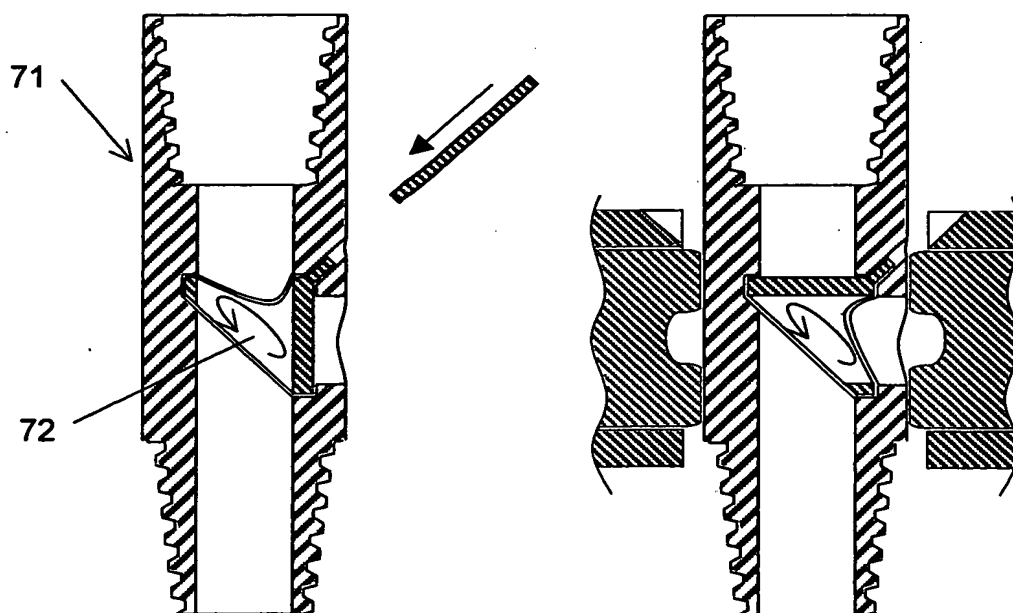


Fig. 7

Not to scale



**THIS PAGE BLANK (USPTO)**



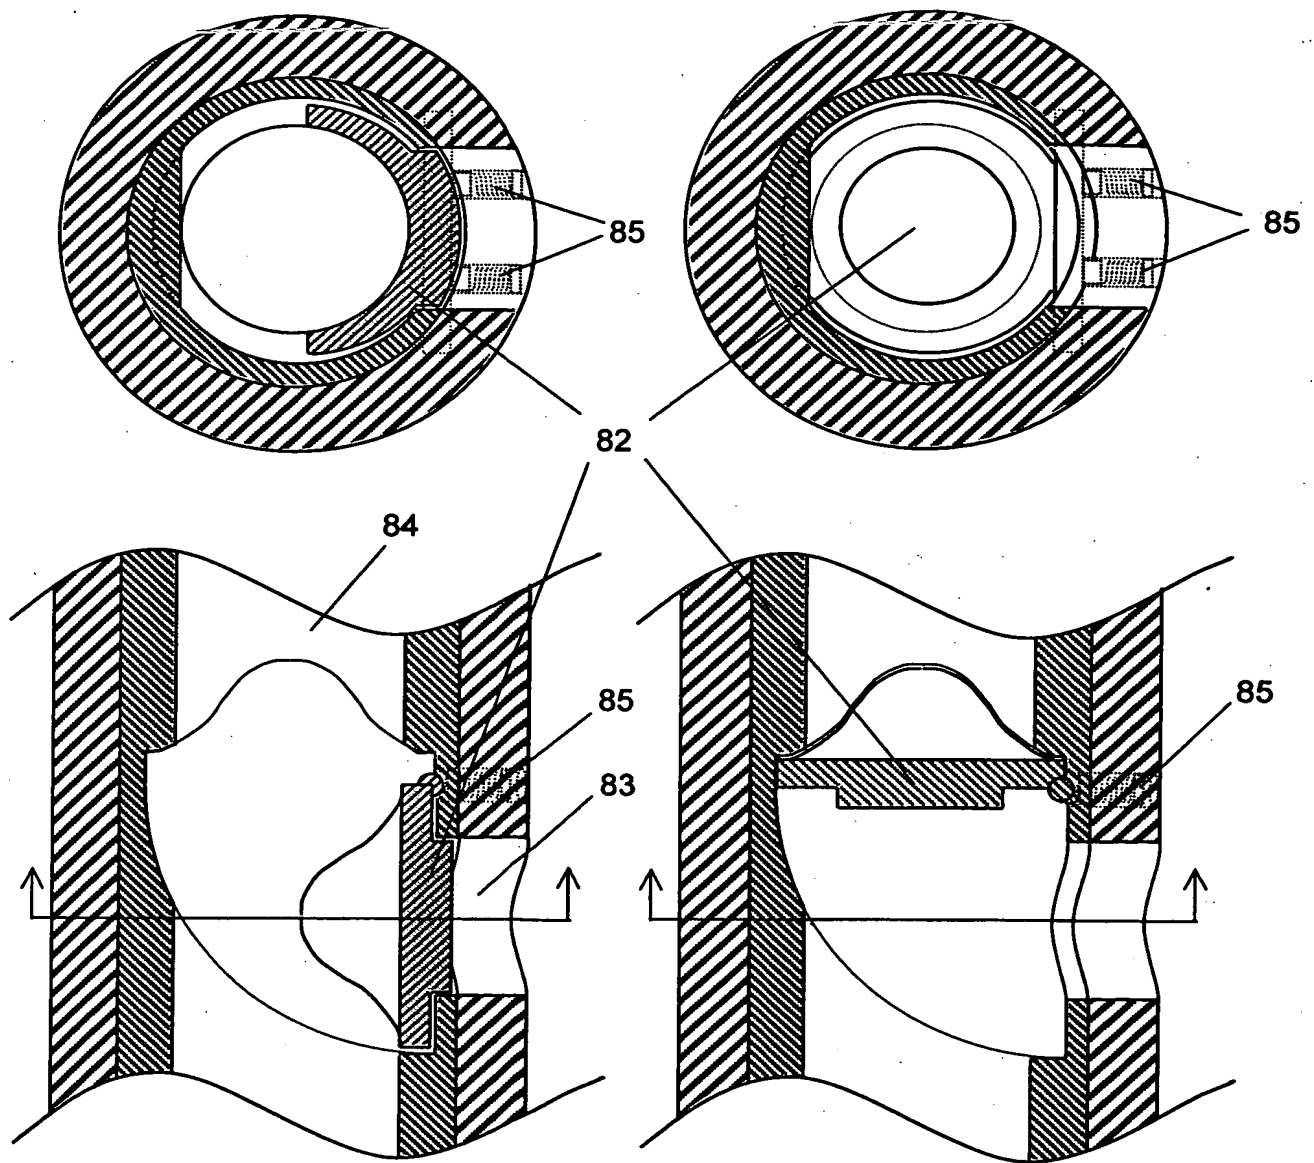


Fig. 8

Not to scale

**THIS PAGE BLANK (USPTO)**

6/12

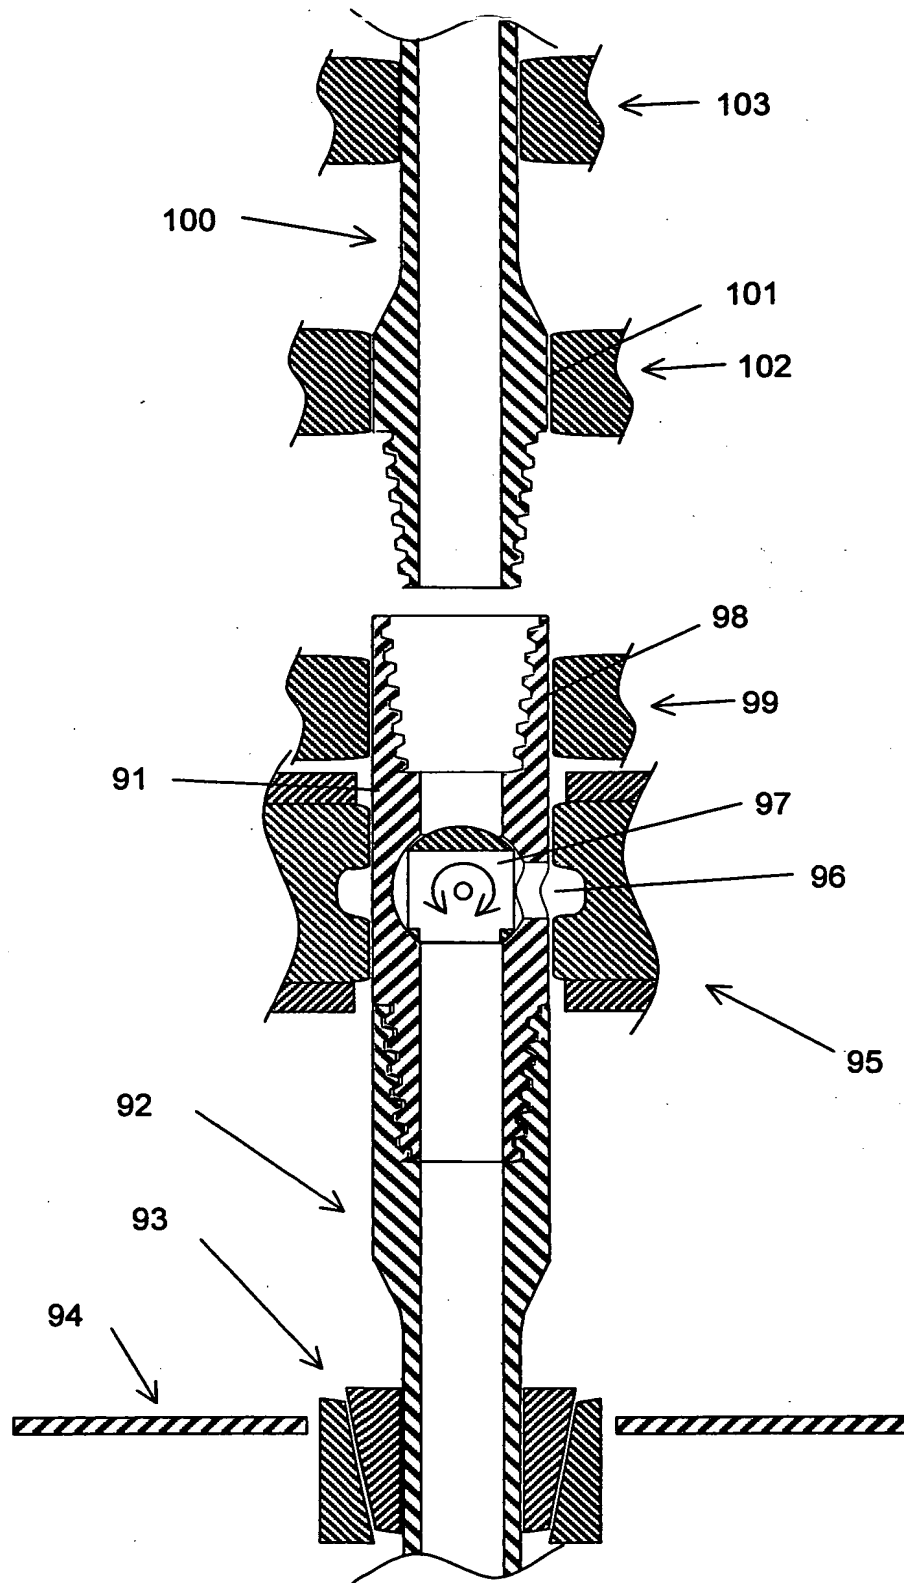


Fig. 9

Not to scale



**THIS PAGE BLANK (USPTO)**

7/12

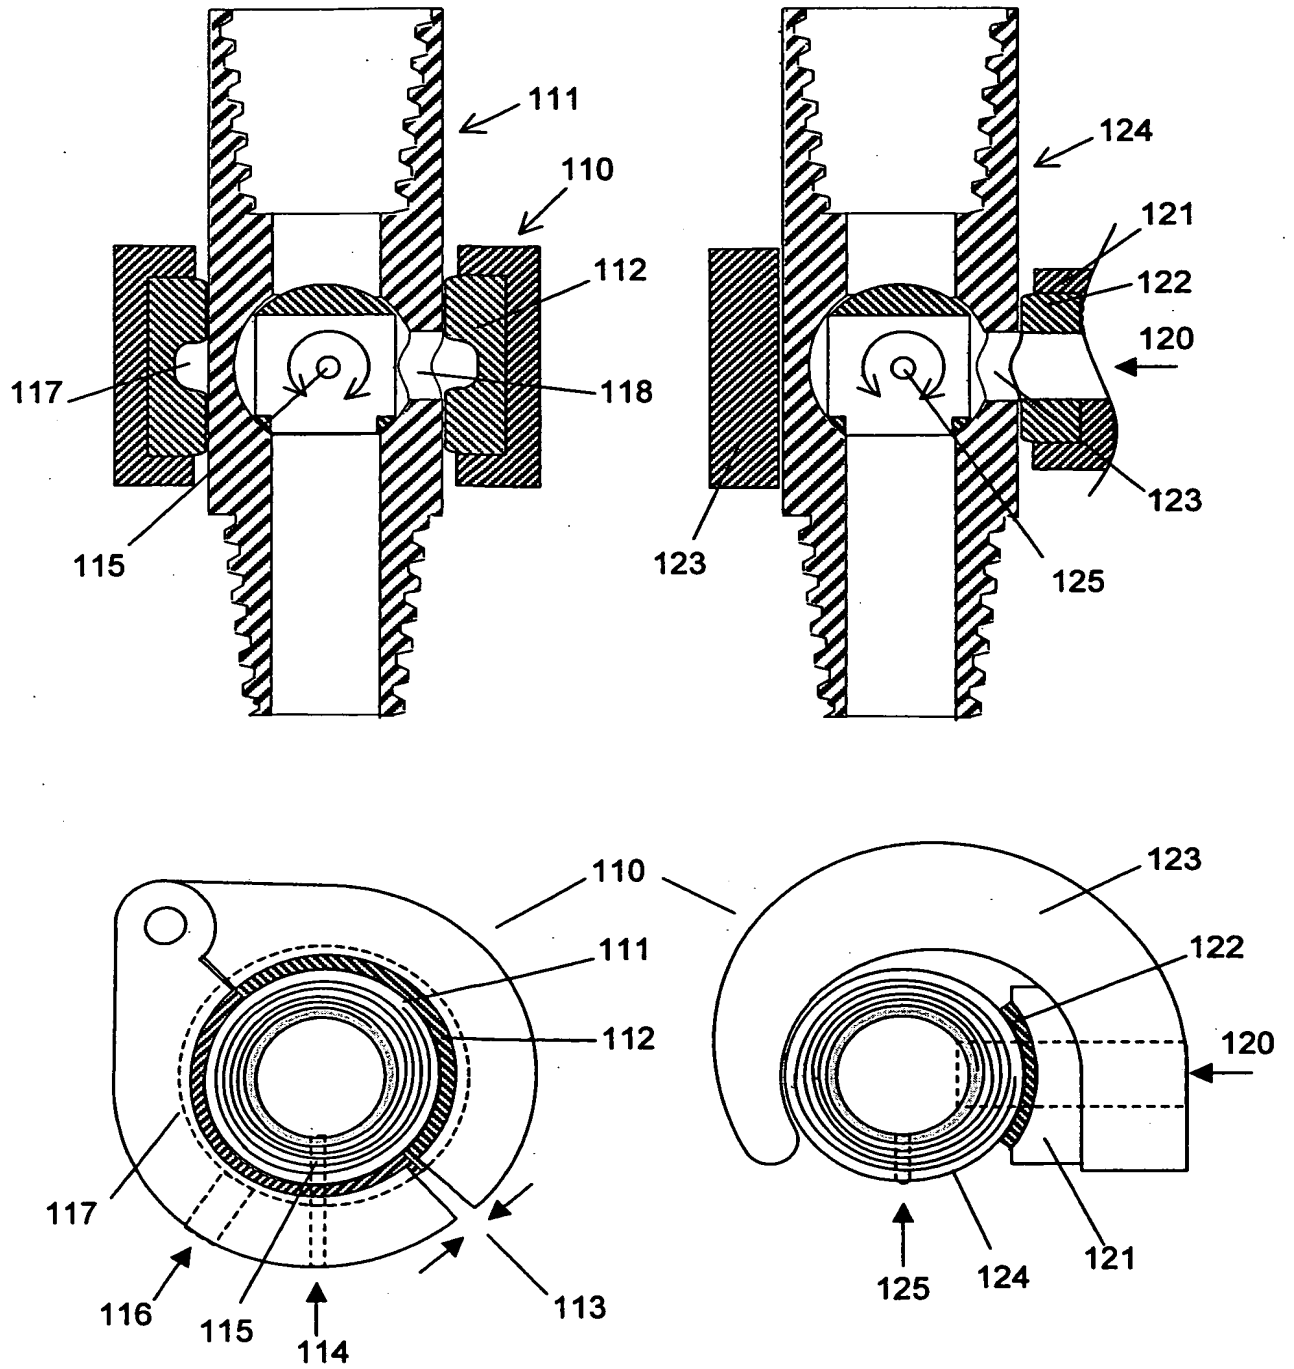


Fig. 10

Not to scale

**THIS PAGE BLANK (USPTO)**

8/12

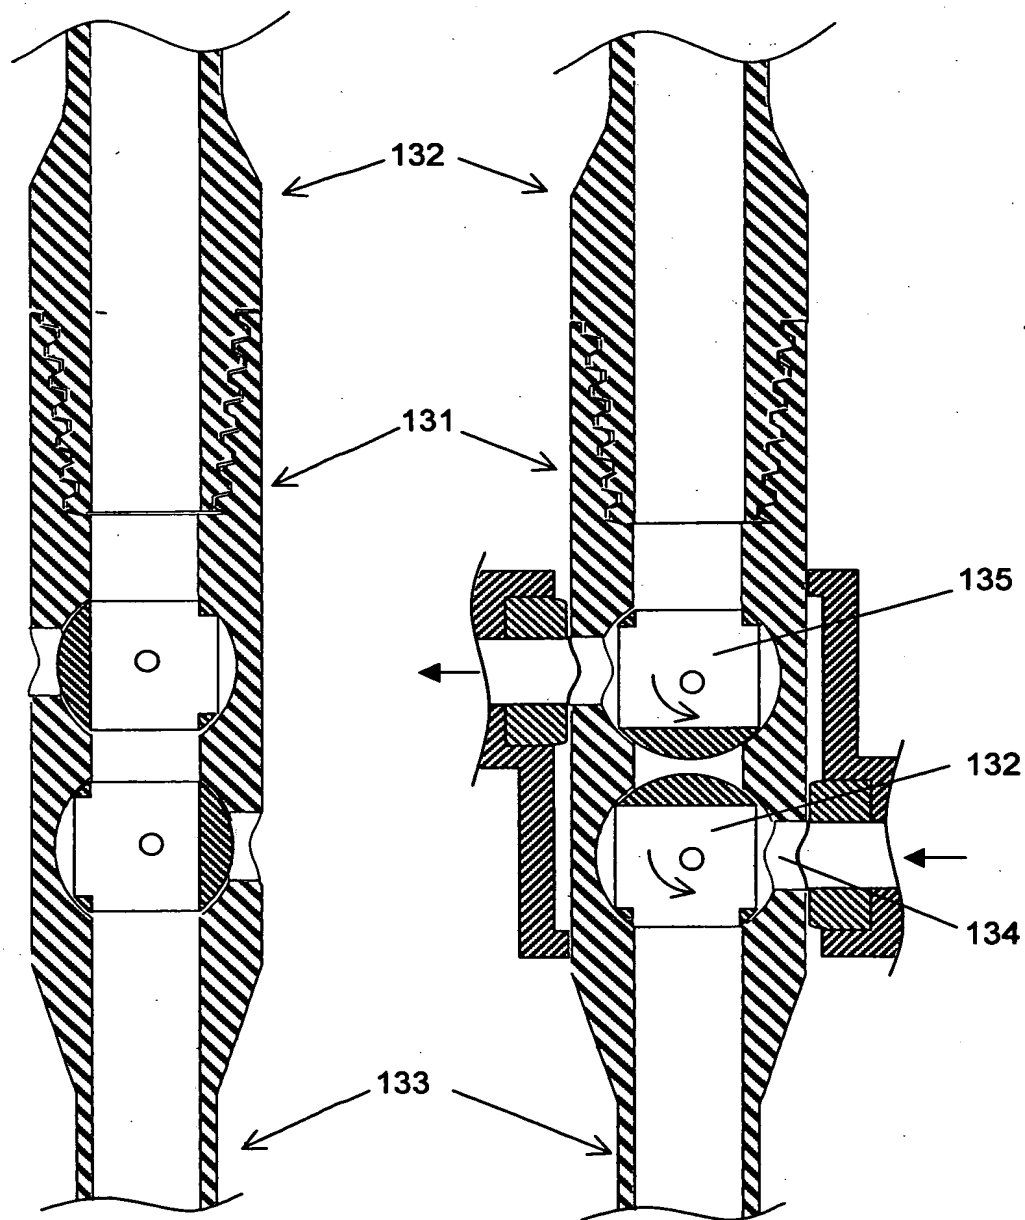


Fig. 11

Not to scale

**THIS PAGE BLANK (USPTO)**



9/12

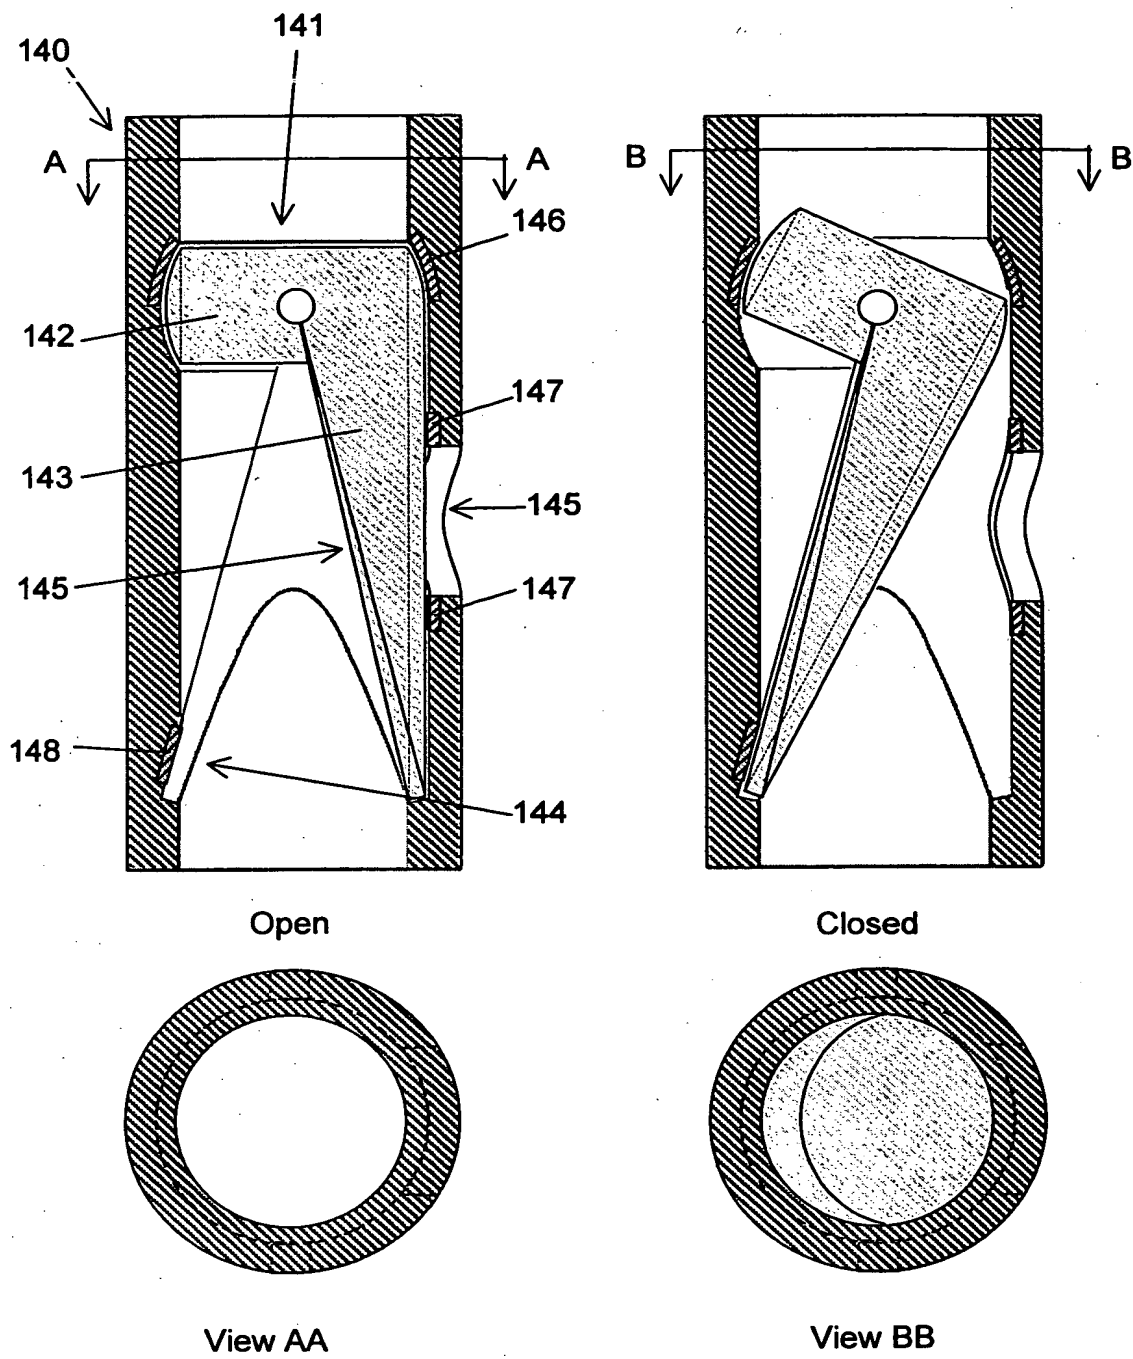


Fig.12



**THIS PAGE BLANK (USPTO)**

10/12

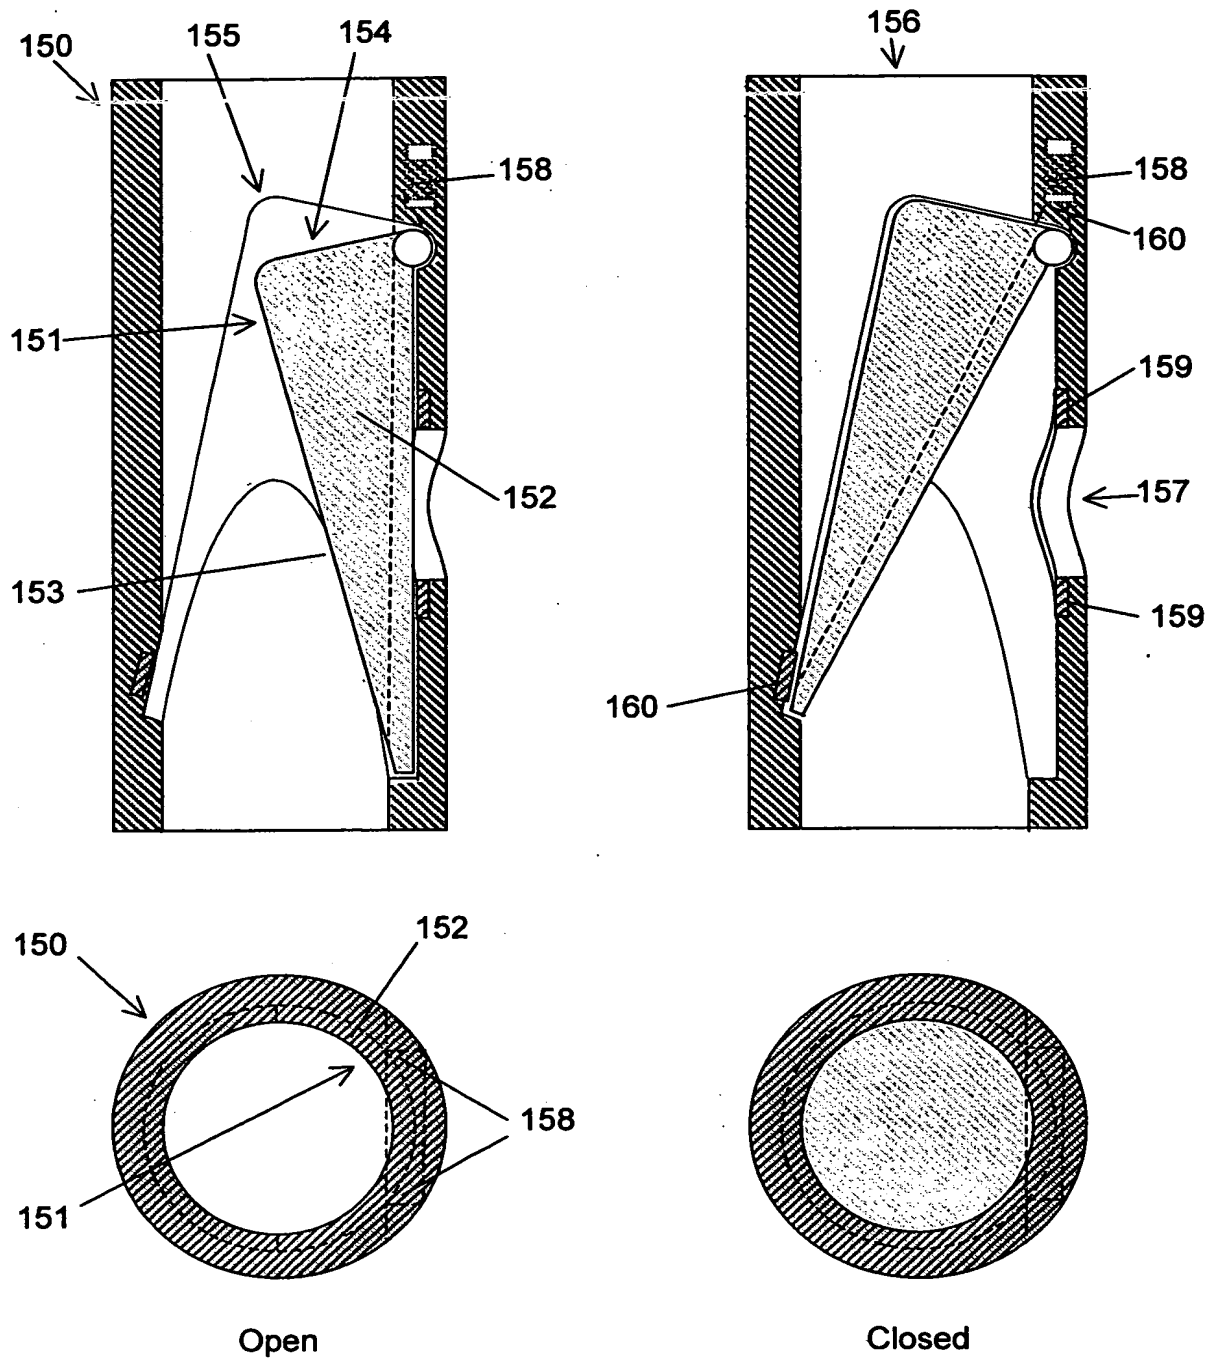


Fig. 13

Not to scale



**THIS PAGE BLANK (USPTO)**

11/12

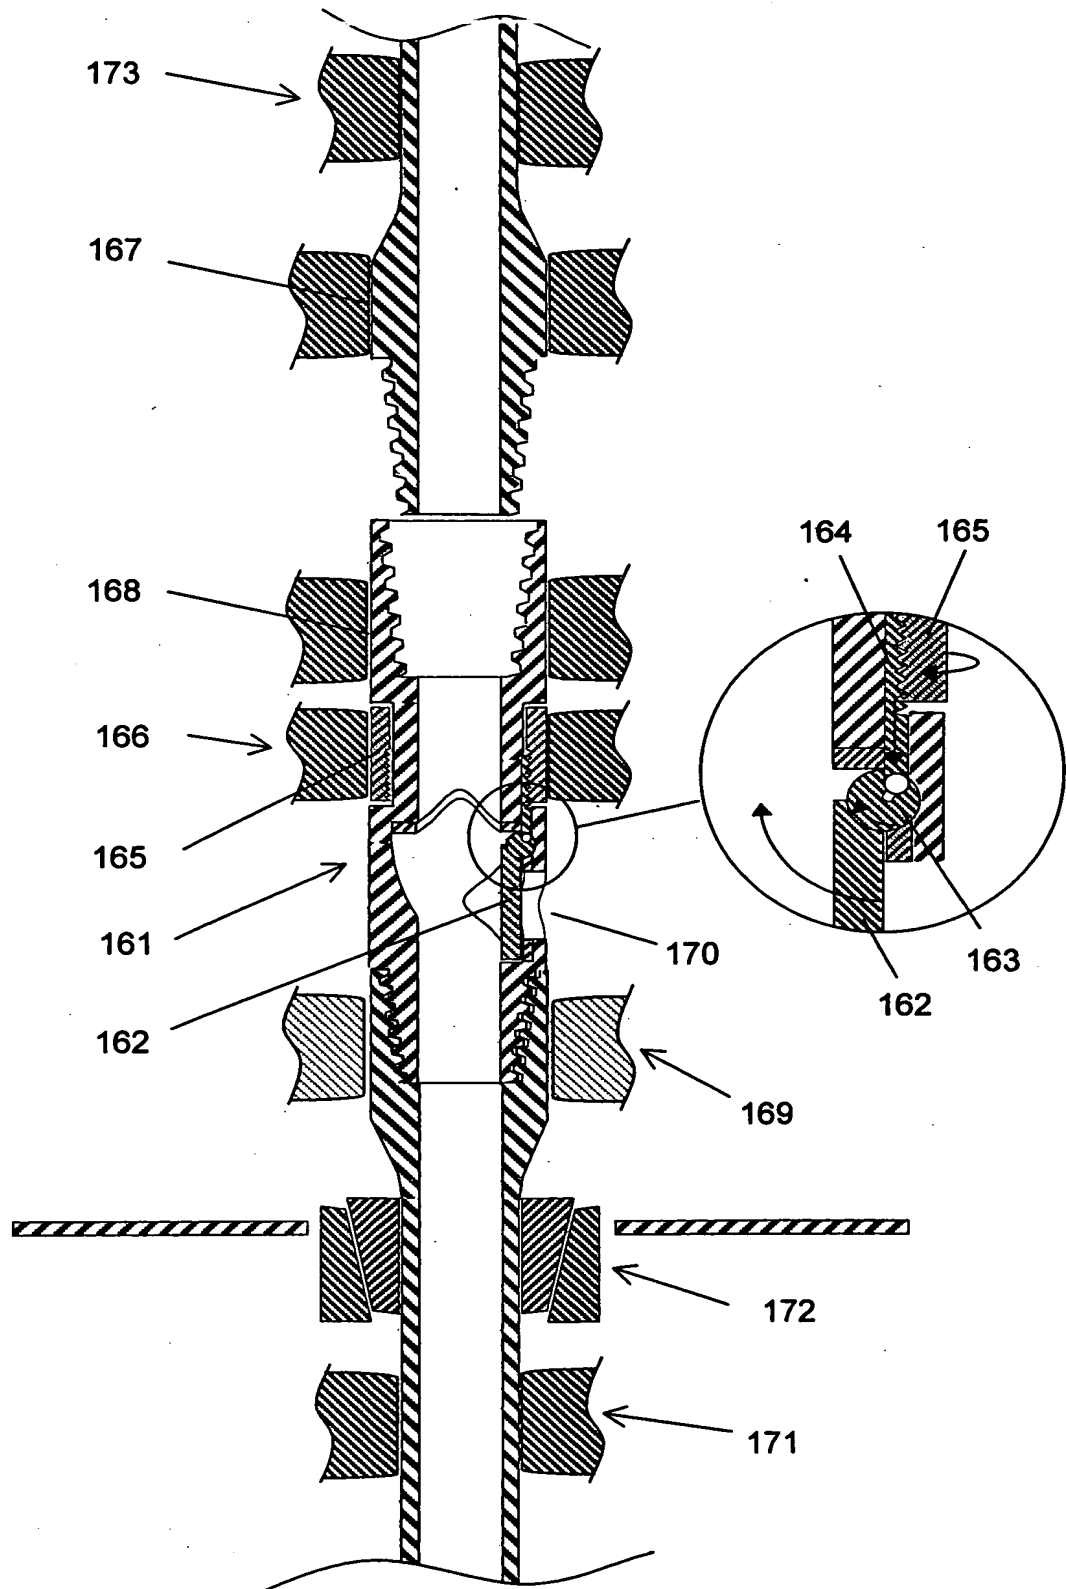




Fig. 14

Not to scale




**THIS PAGE BLANK (USPTO)**

12/12

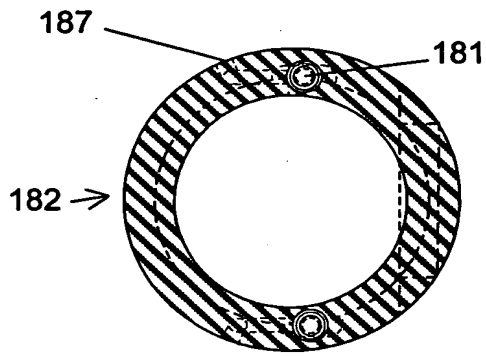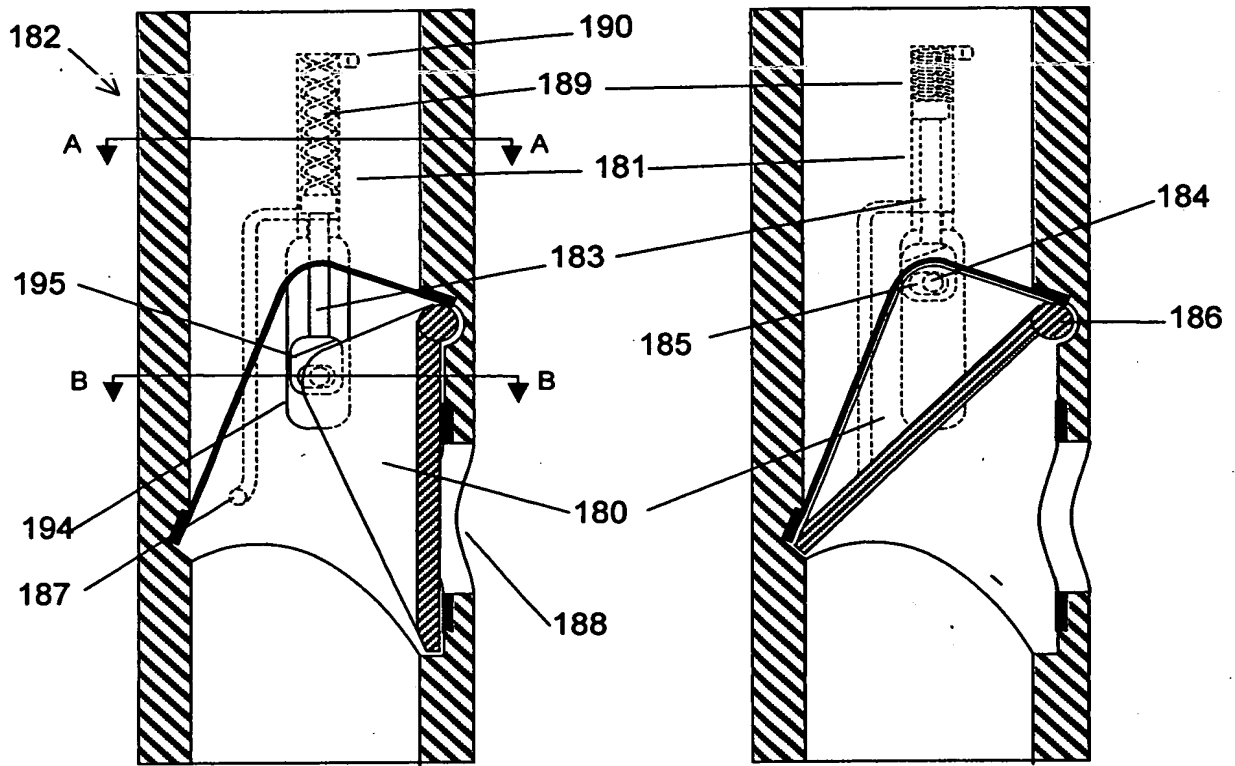

View AA

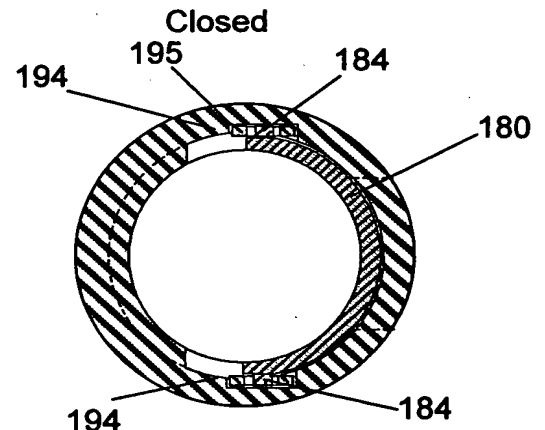

View BB

Fig. 15

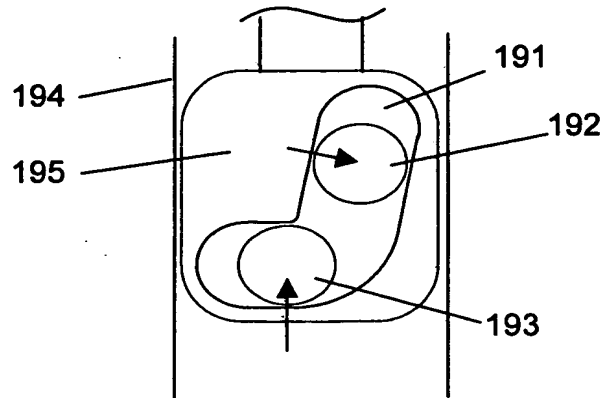


Fig. 16

Not to scale

**THIS PAGE BLANK (USPTO)**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**